

Technical data sheet

Equipotential busbar for flexible wall mounting with separation point

Item number: 5015876



Main equipotential busbar for equipotential bonding to VDE 0100 Part 410/-540 and lightning protection equipotential bonding to VDE 0185-305 (IEC 62305)

- With separation point (Disconnect - DC)
- For flexible wall mounting
- Complete with profile rail (FT) and screws
- Rust-proof stainless steel versions (V2A) are suitable for outdoor use
- Quick, simple mounting of the connection cable using lock bolts M10
- With lock washer (DIN 137) for bolt locking against loosening




A2 Stainless steel

Master data

Item number	5015876
Type	1802 DC 5+5 VA
Description 1	Equipotential busbar
Description 2	BigBar/5+5 connections VA
Manufacturer	OBO
Dimension	5+5 x M10
Material	Stainless steel
Smallest sales unit	1
Unit of quantity	Piece
Weight	237 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	9,7349 kg CO2e / 1 Piece

Dimensions

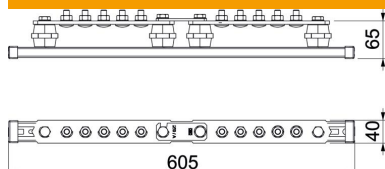

Length	605 mm
Width	40 mm
Height	85 mm

Technical data sheet

Equipotential busbar for flexible wall mounting with separation point

Item number: 5015876



Technical data

Quantity of flat conductor connections up to 30 mm	0
Quantity of flat conductor connections up to 40 mm	0
Quantity of cable connections up to 16 mm ² , rigid	0
Quantity of cable connections up to 25 mm ² , rigid	0
Quantity of cable connections up to 6 mm ² , rigid	0
Quantity of cable connections up to 95 mm ² , rigid	0
Quantity of round conductor connections 10 mm	0
Quantity of round conductor connections 8 mm	0
Quantity of round conductor connections 8-10 mm	0
Number of connections	10
Version for	Only terminal
Type	Modular structure
Lightning current carrying capacity	H/100 kA
Insulator	yes
Material of the terminal	Rustproof steel (V2A)
Material of the contact rail	Rustproof steel (V2A)