


Technical data sheet

MMS-plus P round head tie, with panhead

Item no. 3498272

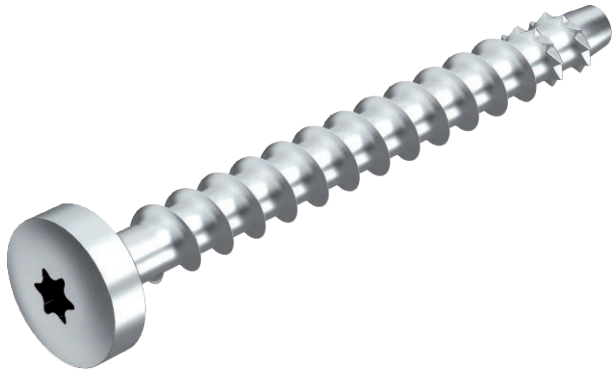

Bolt tie for direct mounting without additional anchors in cracked and uncracked concrete and masonry. With round head for universal fastenings. Torx drive T30.
Construction product tested according to EAD and CE mark, with European Technical Assessment (ETA) and proof of suitability. Load-bearing capacities under fire loads proven up to fire resistance class R120.




St	Steel
G	Electrogalvanised

Master data

Item no.	3498272
Type	MMS+ P 7.5x80
Description 1	Screw anchor
Description 2	with panhead
Dimension	7,5x80mm
Material description	Steel
Material	Steel
Material symbol	St
Interface description	Electrogalvanised
Surface	Electrogalvanised
Surface to DIN	EN ISO 19598 / EN ISO 4042
Surface symbol	G
Smallest sales unit (VG)	50 Piece
Weight	1,60 kg/100 pc.

Technical data

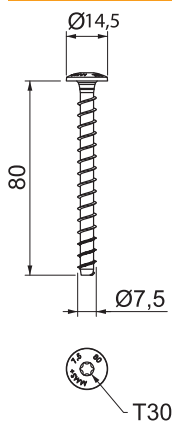

Length	80,00 mm
Dimension L	80,00 mm
Dimension	7,5 x 80 mm
Drill hole diameter	6,00 mm
Anchor length	80,00 mm
Head diameter	14,50 mm
Head shape	Other
Head shape	Other
Screw system	Torx
Screw system	Torx