

Technical data sheet

Height-adjustable heavy-duty cassette, blank, RKNSL, nominal size 4, stainless steel

Item number: 7409008



Heavy-duty "blank" square cassette of nominal size 4 for the creation of an inspection opening in trunking systems, raised or cavity floors, in dry or wet-cleaned floors for indoor use. Load class 1 to 10 kN. Only suitable for smooth floor coverings.

Height-adjustable heavy-duty cassette as a blind cassette with a load bearing capacity of 1–10 kN, 2-compartment. 2 APMT2 cover plates can be installed. For the installation of 2 UT3 universal supports for 4 individual installation devices with support ring/support clamp or 6 Modul 45 devices.



VA

Stainless steel, grade 354/1

Master data


Item number	7409008
Type	RKN2 4 VMSSL1N 15
Description 1	Square cassette SL
Description 2	blank
Manufacturer	OBO
Dimension	200x200mm
Material	Stainless steel, grade 354/1
Smallest sales unit	1
Unit of quantity	Piece
Weight	389 kg
Weight unit	kg/100 pc.

Technical data sheet




Height-adjustable heavy-duty cassette, blank, RKNSL, nominal size 4, stainless steel
Item number: 7409008



Dimensions

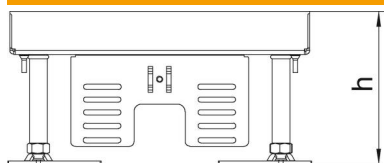

Length	199 mm
Width	199 mm
Dimension h	100 mm

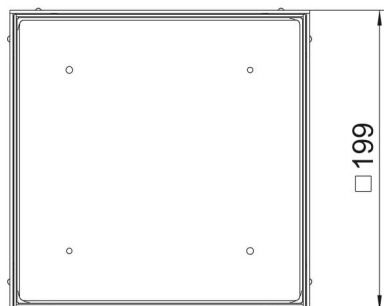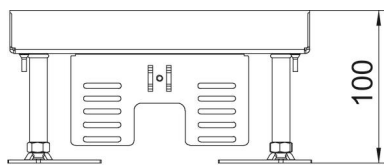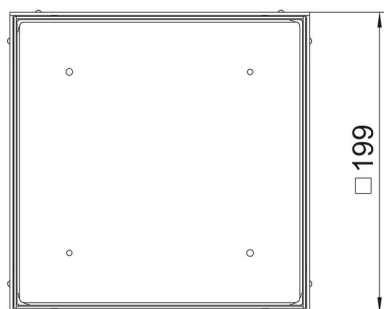

Technical data sheet

Height-adjustable heavy-duty cassette, blank, RKNSL, nominal size 4, stainless steel

Item number: 7409008



Technical data

Number of installable devices	0
Version for	Square
Cable outlet version	No cable outlet
Floor care	Wet
Decouplable	no
Floor height, max.	150 mm
Floor height, min.	100 mm
Suitable for raised floor installation	yes
Suitable for cavity floor installation	yes
Suitable for underfloor box	250/350
Device support to accept mounting boxes	yes
Length of installation dimensions	201 mm
Nominal size for device installation units	4
Height-adjustment range, max.	150 mm
Height-adjustment range, min.	100 mm
Protection rating (IP) when used	IP00
Protection rating (IP) when unused	IP40
Protection rating IK code	IK10
Heavy-duty version	yes
Heavy load class	10 kN (OBO SL1)
Installation system type	UT3