

# Technical data sheet

Height-adjustable cassette for inspection opening, RKN,  
stainless steel

Item number: 7409044



Height-adjustable "blank" cassette for the creation of an inspection opening of nominal size 9 in dry or wet-cleaned floors for indoor use. Only suitable for smooth floor coverings.

For the installation of 3 UT4 universal supports for 9 individual installation devices with support ring/support clamp or 12 Modul 45 devices.



VA Stainless steel, grade 354/1

## Master data

|                     |                              |
|---------------------|------------------------------|
| Item number         | 7409044                      |
| Type                | RKN2 9 VS 20                 |
| Description 1       | Square cassette              |
| Description 2       | blank                        |
| Manufacturer        | OBO                          |
| Dimension           | 243x243mm                    |
| Material            | Stainless steel, grade 354/1 |
| Smallest sales unit | 1                            |
| Unit of quantity    | Piece                        |
| Weight              | 440 kg                       |
| Weight unit         | kg/100 pc.                   |


# Technical data sheet

Height-adjustable cassette for inspection opening, RKN,  
stainless steel




Item number: 7409044



## Dimensions

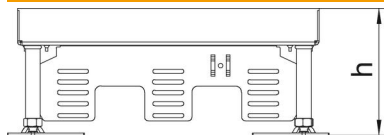

|             |        |
|-------------|--------|
| Length      | 243 mm |
| Width       | 243 mm |
| Dimension h | 100 mm |

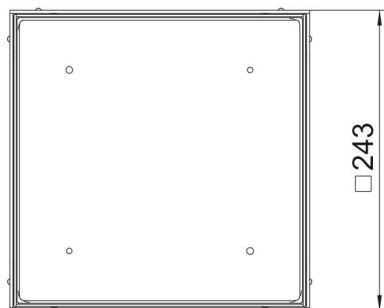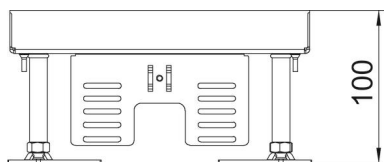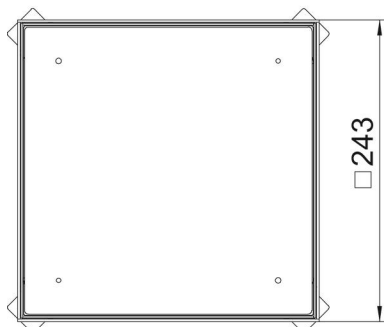

# Technical data sheet

Height-adjustable cassette for inspection opening, RKN,  
stainless steel

Item number: 7409044



## Technical data

|  |                 |
|--|-----------------|
| Number of installable devices              | 0               |
| Number of mounting boxes                   | 3               |
| Number of cable outlets                    | 0               |
| Version for                                | Square          |
| Cable outlet version                       | No cable outlet |
| Floor care                                 | Wet             |
| Decouplable                                | no              |
| Floor height, max.                         | 150 mm          |
| Floor height, min.                         | 100 mm          |
| Suitable for raised floor installation     | yes             |
| Suitable for cavity floor installation     | yes             |
| Suitable for underfloor box                | 250/350         |
| Device support to accept mounting boxes    | no              |
| Length of installation dimensions          | 244 mm          |
| Nominal size                               | 350 mm          |
| Nominal size for device installation units | 9               |
| Height-adjustment range, max.              | 150 mm          |
| Height-adjustment range, min.              | 100 mm          |
| Protection rating (IP) when used           | IP00            |
| Protection rating (IP) when unused         | IP40            |
| Protection rating IK code                  | IK10            |
| Heavy-duty version                         | no              |
| Installation system type                   | UT4             |
| Vertical load, large area                  | to 15,000 N     |
| Vertical load, small area                  | to 3,000 N      |
| Approvals                                  | VDE             |