

Technical data sheet

0° socket, Multistandard, single

Item number: 6120739



Socket, single 0°, multi-standard version, with increased touch protection, with screw terminals, 2-pin, 5/6/10/13 A, 250 V~.  
This socket may not be used in Europe. Country-specific standards and directives must be observed.



PC

 Polycarbonate

Master data		
Item number	6120739	
Description 1	Socket 0°, single	
Description 2	Multi standard	
Manufacturer	OBO	
Colour	Black-grey; RAL 7021	
Material	Polycarbonate	
Smallest sales unit	1	
Unit of quantity	Piece	
Weight	3.95 kg	
Weight unit	kg/100 pc.	
CO Footprint (GWP) Cradle-to-Gate	0,0101 kg COe / 1 Piece	


# Technical data sheet

0° socket, Multistandard, single

Item number: 6120739



## Dimensions

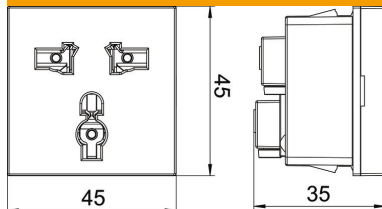

Width	45 mm
Height	45 mm

## Technical data

Cover	Central plate
Closable	no
Connection type	Screw terminal
Number of units	1
Number of switchable sockets	0
Number of poles	2
Printed label/coding	Without printing
Version for	Single 0°
Surface version	Not applicable
Version for	Multistandard socket
Ejection mechanism	no
Fastening type	Lock
Labelling panel	no
Operating temperature, max.	40 °C
Operating temperature, min.	-5 °C
increased touch protection	yes
Error current protection	no
For more difficult conditions (according to VDE)	no
Halogen-free	no
Hinged cover	no
Warning light	no
With on/off switch	no
With fine-wire fuse	no
With functional lighting	no
With orientation lighting	no
Mounting type	Device installation duct
Nominal voltage	250 V
Protection rating	Other
Special power supply	Without special power supply
Socket angle	0°
Depth	35 mm
Transparent	no
Rotated central insert	no
Surge protection	no