


Technical data sheet

Vario quick connector 200 kA

Item no. 5311595

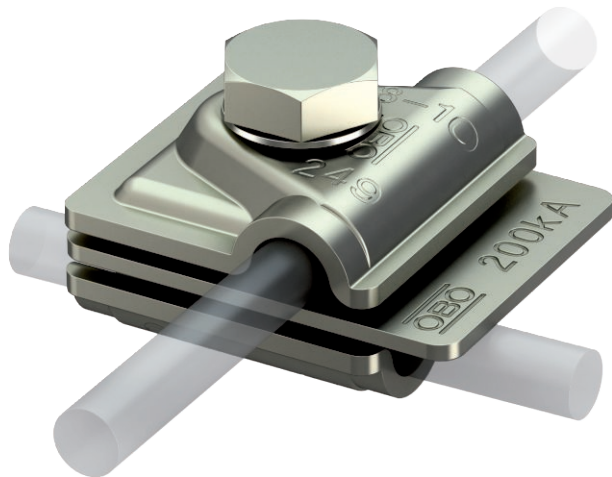

- For T, intersection and parallel connections
- Quick mounting using an M10 x 30 bolt, made from rustproof stainless steel
- Meets the requirements of VDE 0185-305 (IEC 62305)
- Tested according to VDE 0185-561-1 (IEC/EN 62561-1) with 200 kA
- For use in lightning protection class I with the isCon® Premium conductor





VA Stainless steel, rustproof 1.4301

Product description

Master data

Item no.	5311595
Type	249 8-10 V2A 200
Description 1	Quick connector 200kA
Description 2	Vario
Dimension	8-10mm
Material	Stainless steel, material no. 1.4301
Material symbol	A2
Quality	1,43
Weight	12,37 kg/100 pc.

Technical data

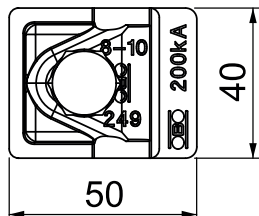

Type of fastening screw	Hex set screw
Type of connector	Multipurpose connection clamp
Lightning current carrying capacity	H2/200 kA
Suitable for connection	Round conductor Rd 8-10 / Rd 8-10
Fit	Rd 8-10 mm
Intermediate plate	<input type="checkbox"/>