## **Technical data sheet**

UDHOME-ONE floor socket, without floor covering recess, BS socket, stainless steel Item number: 7368306





Square floor socket for use in dry-care systems and screed floors in indoor areas. Installation housing with pre-marked insertion openings for pipes (M20/M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. The minimum installation depth is 75 mm, the height-adjustment range +30 mm. Frame and cover made of stainless steel and visible in the floor covering. Cover with decorative plate. The load-bearing capacity of 15 kN is only guaranteed when in an unused state. The delivery includes a switched BS socket.




Master data

Item number	7368306
Туре	UDHOME-ONE V BS
Description 1	Floor socket
Description 2	with BS socket, decor lid
Manufacturer	OBO
Dimension	140x140x75
Material	Stainless steel
Smallest sales unit	1
Unit of quantity	Piece
Weight	199 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to- Gate	11,1567 kg COe / 1 Piece

## **Technical data sheet**

UDHOME-ONE floor socket, without floor covering recess, BS socket, stainless steel Item number: 7368306



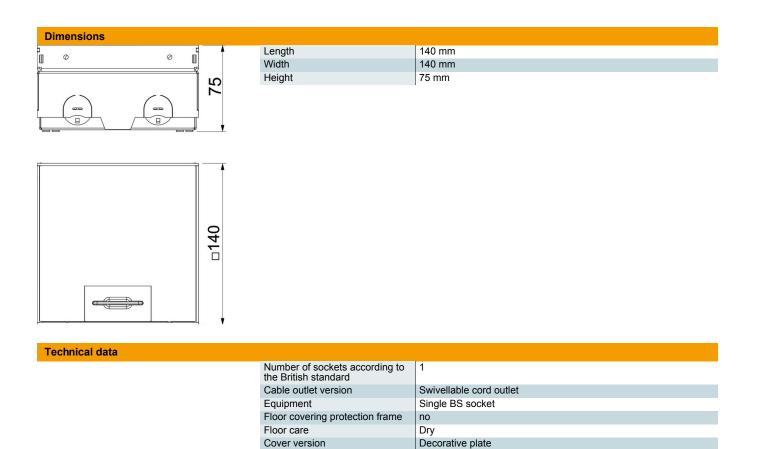

no

105 mm

75 mm

yes

no

no

no

no

no

no

IP20

IP40

IK10

to 15,000 N

no

6.101.1 Dry floor care

6.101.1 Dry floor care

Seal installation option

Application when used

Floor height, max.

Floor height, min.

underfloor ducts

Suitable for wet care

derfloor ducts

ting boxes

sed

on

Application when unused

Suitable for raised floor installati-

Suitable for screed-flush closed

Suitable for screed-covered un-

Suitable for underfloor ducts

With floor covering recess

Protection rating IK code

Vertical load, large area

Heavy-duty version

Device support to accept moun-

Protection rating (IP) when used

Protection rating (IP) when unu-

Suitable for cavity floor installation yes

## **Technical data sheet**

UDHOME-ONE floor socket, without floor covering recess, BS socket, stainless steel Item number: 7368306



**Technical data** 

Vertical load, small area Opening mechanism to 3,000 N Handle