

Technical data sheet

GES9-3 service outlet with handle clamp

Item no. 7405097



Service outlet with metal installation frame for mounting of 3 cover plates of shape APMT5, for use in UGD and UDS underfloor boxes.

Universal fastening brackets adjustable to floor thicknesses up to 65 mm.

Carpet protection frame, hinged lid and cord outlet made of PC/ABS.

Floor covering recess in the hinged cover pre-adjusted to 5 mm, if necessary adjustable to 10 mm.




PA Polyamide

Master data

Item no.	7405097
Type	GES9-3 UME 7011
Description 1	Service outlet
Description 2	for UDS mounting
Dimension	264x264x70
Colour	Iron grey
RAL number	7011
Material	Polyamide
Material symbol	PA
Smallest sales unit (VG)	1 Piece
Weight	240,00 kg/100 pc.

Technical data

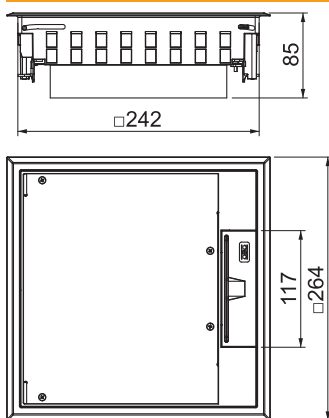

Height	70,00 mm
Dimension h	70,00 mm
Wide external dimensions	264,00 mm
Wide installation dimensions	244,00 mm
Length of external dimensions	264,00 mm
Length of installation dimensions	244,00 mm
Number of installable devices	6
Number of mounting boxes	3
Cable outlet version	Swivellable cord outlet
Floor covering thickness	10,00 mm
Floor care	Dry
Version for	Square
Seal installation option	<input type="checkbox"/>
Suitable for wet care	<input type="checkbox"/>
Suitable for screed-flush closed underfloor ducts	<input type="checkbox"/>
Suitable for screed-covered underfloor ducts	<input checked="" type="checkbox"/>
Suitable for raised floor installation	<input checked="" type="checkbox"/>
Suitable for cavity floor installation	<input checked="" type="checkbox"/>
Opening mechanism	Handle
Frame version	Carpet protection frame