


Technical data sheet

UGD350-3 GES 6 for rectangular installation units, for
screed height 70–125 mm

Item number: 7410108



Underfloor accessory box for screed-covered underfloor installation ducts with sheet steel side walls. To mount installation units of the selected nominal size. Height can be infinitely adjusted to the nominal screed height (rapid adjustment possible) and the screed can be worked flush to the screed scraping edge. With noise decoupling option after screed laying and can be used with system accessories, also for heavy-duty application. Side walls prepared for duct widths of 190, 250 and 350 mm.

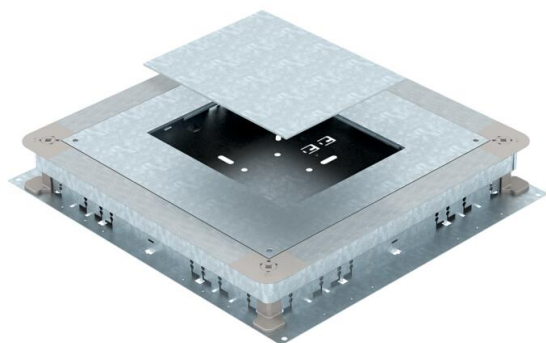

St Steel

FS Strip galvanized

Master data

| | |
|-----------------------------------|--------------------------|
| Item number | 7410108 |
| Type | UGD 350-3 6 |
| Description 1 | Underfloor box empty |
| Description 2 | 350-3 for GES6 |
| Manufacturer | OBO |
| Dimension | 510x467x70 |
| Material | Steel |
| Surface | Strip galvanized |
| Surface standard | DIN EN 10346 |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 898 kg |
| Weight unit | kg/100 pc. |
| CO Footprint (GWP) Cradle-to-Gate | 20,8001 kg COe / 1 Piece |


Technical data sheet

UGD350-3 GES 6 for rectangular installation units, for
screed height 70–125 mm

Item number: 7410108



Dimensions

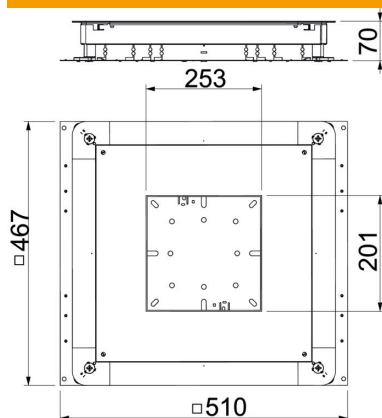

| | |
|-------------|--------|
| Dimension a | 201 mm |
| Dimension A | 467 mm |
| Dimension B | 510 mm |
| Dimension b | 253 mm |

Technical data

| | |
|---|-------------|
| Floor plate | yes |
| Lowerable to be flush-floor | no |
| Seal installation option | yes |
| Installation opening for on-floor tank | no |
| Installation opening for flush-mount unit | Rectangular |
| Decouplable | yes |
| Screed height, max. | 125 mm |
| Screed height, min. | 70 mm |
| For pipe connection | no |
| Suitable for screed-flush closed underfloor ducts | no |
| Suitable for screed-covered underfloor ducts | yes |
| Trunking width, max. | 350 mm |
| Trunking width, min. | 190 mm |
| Trunking height, max. | 48 mm |
| Duct height, min. | 28 mm |
| Minimum screed height | 70 |
| Nominal size | 350 mm |
| Nominal size for device installation units | 6 |
| Height-adjustment range, max. | 125 mm |
| Height-adjustment range, min. | 70 mm |