

Technical data sheet

Junction box, B 25 M, without thread

Item no. 2001136



Protection rating IP54, rated voltage 660 V, nominal cross-section 2,5 mm², two fastening holes for screws of up to 4.5 mm Ø in the interior of the box (seals and covers included), M6 fastening thread and adhesive area under the base, 1 cover screw, 7 break-out entries Ø 21 mm (M 20), with 4 cable entries EDVS 20 for cable diameters 7.5–14 mm. Clear internal dimensions: 73x73x35 mm.




UF Duroplast, Aminoplast, type 131.5

Product text, scope of delivery | Without earthing terminal

Master data

Item no.	2001136
Type	B 25 M
Description 1	Junction box
Dimension	83x83x40
Colour	Light grey
RAL number	7035
Material	Duroplast, Aminoplast, type 131.5
Material symbol	UF
Smallest sales unit (VG)	5 Piece
Weight	10,40 kg/100 pc.

Technical data

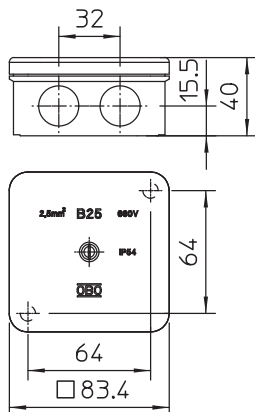

Length	83,40 mm
Width	83,40 mm
Height	40,00 mm
Clear internal dimensions	73x73x35 mm
Dimension LxWxH	83,4x83,4x40 mm
Dimension	83,4 x 83,4 x 40 mm
Expandable	<input type="checkbox"/>
No. of entries	7
Type of entry	Cable
Type of entry	Gland
Type of housing penetration	Pre-marking
Measured insulation voltage Vi	660,00 V
Cover	Not transparent
Cover fastening	Screwed
Entries	7 break-out entries Ø 21 mm (M 20), with 4 cable entries EDVS 20 for cable diameters 7.5–14 mm
Entry from rear	<input type="checkbox"/>
Explosion-tested version	<input type="checkbox"/>
Flame-resistant	acc. to VDE 0471/DIN 695 Part 2-1, test temperature 750°C
Shape	Square

Technical data sheet

Junction box, B 25 M, without thread

Item no. 2001136



Technical data

Function maintenance (ETIM)	Without
For Ex zone	Without
For Ex zone gas	Without
For Ex zone dust	Without
For pipe diameter	20 mm
Fibre-glass reinforced	<input type="checkbox"/>
Halogen-free	<input checked="" type="checkbox"/>
With screening	<input type="checkbox"/>
with lid	Yes
With cover	<input checked="" type="checkbox"/>
Installation type	Wall/ceiling mounting
Mounting type	Wall/ceiling mounting
Nominal cross section	2,50 mm ²
Nominal voltage	660,00 V
Protection rating	IP54
Protection rating	IP54
Sealable	<input type="checkbox"/>
Impact-resistant	<input type="checkbox"/>
Transparent lid	<input type="checkbox"/>
Weatherproof	<input type="checkbox"/>