

Technical data sheet

Connection element for installation in the insulated interception rod isFang IN

Item number: 5408019



- For the isCon® Basic and Professional cable
- Cable connection and routing in the insulated air-termination rod
- Screw-on termination
- Including heat-shrinkable sleeve and hexagonal wrench
- Tested to up to 150 kA (lightning protection class II)



A2 Stainless steel

Master data

Item number	5408019
Description 1	Connection element
Description 2	for isCon Basic + Pro internal
Manufacturer	OBO
Dimension	Ø20mm
Material	Stainless steel
Smallest sales unit	1
Unit of quantity	Piece
Weight	27.8 kg
Weight unit	kg/100 pc.

Technical data sheet

Connection element for installation in the insulated interception rod isFang IN


Item number: 5408019



Dimensions

Dimension d min.

28 mm

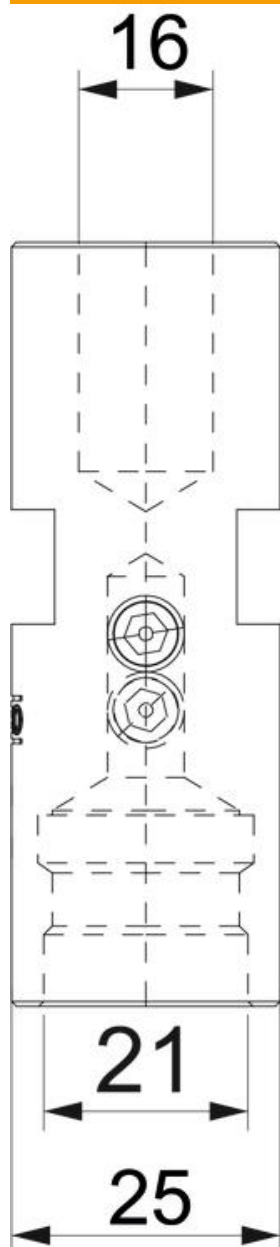

Technical data sheet

Connection element for installation in the insulated interception rod isFang IN

Item number: 5408019



Technical data

Lightning current carrying capacity	H1/150 kA
Suitable for connection	Miscellaneous
Fit	20 mm