

# Technical data sheet

## Clamp clip, double, plastic pressure trough

Item number: 1170228



Suitable for flat, bracket and U irons of 4–12 mm material thickness.  
Clip and bolt made of hot-dip galvanised steel.  
Polypropylene pressure trough, halogen-free, colour light grey RAL 7035.  
Version with welding and/or locknuts for use under difficult circumstances and for shake protection on request.



St

Steel

FT

Hot-dip galvanised

### Master data

Item number	1170228
Type	2056F 2 22 FT
Description 1	Clamp clip
Description 2	double
Manufacturer	OBO
Dimension	16-22mm
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	50
Unit of quantity	Piece
Weight	5.2 kg
Weight unit	kg/100 pc.
CO <sub>2</sub> Footprint (GWP) Cradle-to-Gate	0,1111kg CO <sub>e</sub> / 1 Piece


# Technical data sheet

## Clamp clip, double, plastic pressure trough

Item number: 1170228



### Dimensions

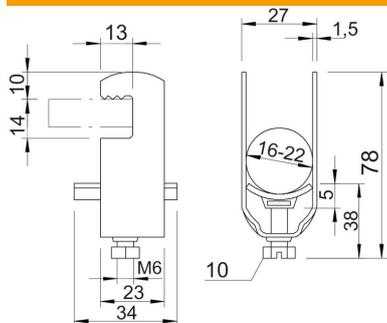

Dimension A	23 mm
Dimension B	27 mm
Dimension C	34 mm
Dimension E	13 mm
Dimension G (mm)	M6
Dimension H	78 mm
Dimension L	38 mm
Dimension t	1.5 mm
Dimension x	5 mm

### Technical data

Number of cables/pipes	2
for 1 cable H	54 mm
for 1 cable L	25
for 2 cable H	78 mm
for 2 cable L	38 mm
for 3 cable H	102 mm
for 3 cable L	38 mm
For pipe diameter, max.	20 mm
For pipe diameter, min.	20 mm
Halogen-free	yes
Max. Tightening torque	3 Nm
With plastic trough	yes
With metal trough	no
Mounting type	Flat profile
Impact-resistant	no
Clamping range D, max.	22 mm
Clamping range D, min.	16 mm
Surface addition	hot galvanised
Material addition	Steel
With counter-trough	no
Material of trough	Plastic
Material quality of trough	Polypropylene