

Technical data sheet

Clamp clip, double, plastic pressure trough

Item number: 1181165



Suitable for angular steel of 40 mm shaft length.

Clip and bolt made of hot-dip galvanised steel.

Polypropylene pressure trough, halogen-free, colour light grey RAL 7035.



St Steel

FT Hot-dip galvanised

Master data

| | |
|------------------------------------|-------------------------|
| Item number | 1181165 |
| Type | 2056W 2 16 FT |
| Description 1 | Clamp clip |
| Description 2 | double |
| Manufacturer | OBO |
| Dimension | 12-16mm |
| Material | Steel |
| Surface | Hot-dip galvanised |
| Surface standard | DIN EN ISO 1461 |
| Smallest sales unit | 50 |
| Unit of quantity | Piece |
| Weight | 5.7 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,1656 kg COe / 1 Piece |


Technical data sheet

Clamp clip, double, plastic pressure trough

Item number: 1181165



Dimensions

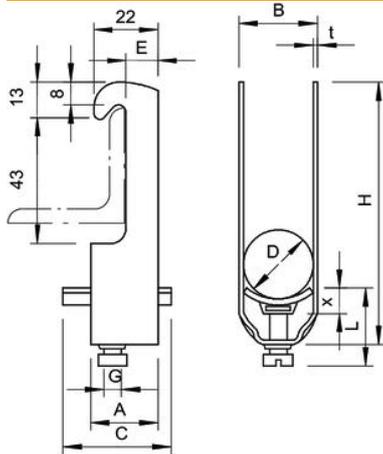

| | |
|------------------|--------|
| Dimension A | 23 mm |
| Dimension B | 20 mm |
| Dimension C | 34 mm |
| Dimension E | 11 mm |
| Dimension G (mm) | M6 |
| Dimension H | 96 mm |
| Dimension L | 34 mm |
| Dimension t | 1.5 mm |
| Dimension x | 5 mm |

Technical data

| | |
|----------------------------|----------------|
| Number of cables/pipes | 2 |
| for 1 cable H | 78 mm |
| for 1 cable L | 27 |
| for 2 cable H | 96 mm |
| for 2 cable L | 34 mm |
| for 3 cable H | 114 mm |
| for 3 cable L | 34 mm |
| For pipe diameter, max. | 16 mm |
| For pipe diameter, min. | 16 mm |
| Halogen-free | yes |
| Max. Tightening torque | 3 Nm |
| With plastic trough | yes |
| With metal trough | no |
| Mounting type | Angle profile |
| Impact-resistant | no |
| Clamping range D, max. | 16 mm |
| Clamping range D, min. | 12 mm |
| Surface addition | hot galvanised |
| Material addition | Steel |
| With counter-trough | no |
| Material of trough | Plastic |
| Material quality of trough | Polypropylene |