

Technical data sheet

Clamp clip 2056 H-foot, 1-fold, metal pressure sleeve, A2

Item number: 1186122



Clamp clip with hammerhead foot, metal pressure sleeve with rounded edges to protect the cable. For vertical and horizontal mounting of 1 single cable on a C-profile rail. For a slot width 16–17 mm. With 1-start screw thread on pressure sleeve, universal hexagonal screw head WAF10, with slot and cross recess. Suitable for assembly indoors and outdoors. We recommend the use of a counter-sleeve.



A2 Stainless steel

2B Bright, treated

Master data

| | |
|------------------------------------|--------------------------|
| Item number | 1186122 |
| Type | BS-H1-M-28 A2 |
| Description 1 | Clamp clip 2056 |
| Manufacturer | OBO |
| Dimension | 22-28mm |
| Material | Stainless steel 1.4301 |
| Surface | Bright, treated |
| Surface standard | |
| Smallest sales unit | 25 |
| Unit of quantity | Piece |
| Weight | 6.1 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,3455 kg CO2e / 1 Piece |


Technical data sheet

Clamp clip 2056 H-foot, 1-fold, metal pressure sleeve, A2

Item number: 1186122



Dimensions

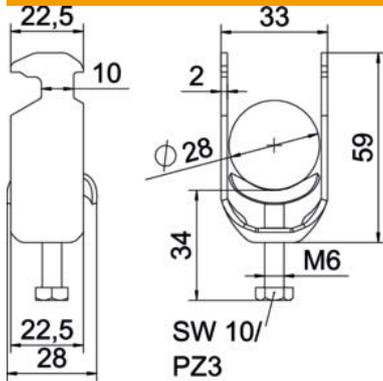

| | |
|------------------|---------|
| Length | 22.5 mm |
| Width | 33 mm |
| Height | 59 mm |
| Plate thickness | 2 mm |
| Dimension A | 22.5 mm |
| Dimension B | 33 mm |
| Dimension C | 28 mm |
| Dimension G (mm) | M6 |
| Dimension H | 59 mm |
| Dimension L | 34 mm |
| Dimension t | 2 mm |

Technical data

| | |
|--|------------------------------|
| Number of cables/pipes | 1 |
| Maintain electrical functions | yes |
| For pipe diameter, max. | 28 mm |
| For pipe diameter, min. | 22 mm |
| for rail with slot width (with interval), max. | 17 mm |
| for rail with slot width (with interval), min. | 16 mm |
| Thread | M6 |
| Halogen-free | yes |
| Length of external dimensions | 28 mm |
| Max. Tightening torque | 3 Nm |
| With plastic trough | no |
| With metal trough | yes |
| Mounting type | Profile rail |
| Slot width | 10 mm |
| Clamping range D, max. | 28 mm |
| Clamping range D, min. | 22 mm |
| Surface addition | Untreated |
| Material addition | Rustproof steel |
| With counter-trough | no |
| Material of trough | Rustproof steel |
| Material quality of trough | Stainless steel 304 (1.4301) |