

# Technical data sheet

## Clamp clip 2056 N-foot, 1-fold, plastic pressure sleeve, FT

Item number: 1187244



Clamp clip with N-foot, plastic pressure sleeve made of polypropylene. For vertical and horizontal mounting of 1 single cable on a C-profile rail. For slot width 11–12 mm With 1-start screw thread on pressure sleeve, universal hexagonal screw head WAF10, with slot and cross recess. Suitable for assembly indoors and outdoors. We recommend the use of a counter-sleeve.



|    |                    |
|----|--------------------|
| St | Steel              |
| FT | Hot-dip galvanised |

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 1187244                  |
| Type                               | BS-N1-K-52 FT            |
| Description 1                      | Clamp clip 2056          |
| Manufacturer                       | OBO                      |
| Dimension                          | 46-52mm                  |
| Material                           | Steel                    |
| Surface                            | Hot-dip galvanised       |
| Surface standard                   | DIN EN ISO 1461          |
| Smallest sales unit                | 100                      |
| Unit of quantity                   | Piece                    |
| Weight                             | 7.27 kg                  |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,2183 kg CO2e / 1 Piece |


# Technical data sheet

Clamp clip 2056 N-foot, 1-fold, plastic pressure sleeve, FT

Item number: 1187244



## Dimensions

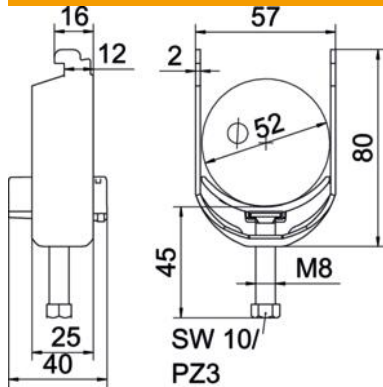

|                  |       |
|------------------|-------|
| Length           | 25 mm |
| Width            | 57 mm |
| Height           | 80 mm |
| Plate thickness  | 2 mm  |
| Dimension A      | 25 mm |
| Dimension B      | 57 mm |
| Dimension C      | 40 mm |
| Dimension G (mm) | M8    |
| Dimension H      | 80 mm |
| Dimension L      | 45 mm |
| Dimension t      | 2 mm  |

## Technical data

|                                                |                |
|------------------------------------------------|----------------|
| Number of cables/pipes                         | 1              |
| For pipe diameter, max.                        | 52 mm          |
| For pipe diameter, min.                        | 46 mm          |
| for rail with slot width (with interval), max. | 12 mm          |
| for rail with slot width (with interval), min. | 11 mm          |
| Thread                                         | M8             |
| Halogen-free                                   | yes            |
| Length of external dimensions                  | 40 mm          |
| Max. Tightening torque                         | 5 Nm           |
| With plastic trough                            | yes            |
| Mounting type                                  | Profile rail   |
| Slot width                                     | 10 mm          |
| Clamping range D, max.                         | 52 mm          |
| Clamping range D, min.                         | 46 mm          |
| Surface addition                               | hot galvanised |
| Material addition                              | Steel          |
| With counter-trough                            | no             |
| Material of trough                             | Plastic        |
| Material quality of trough                     | Polypropylene  |