


# Technical data sheet

## Empty housing X 10

Item number: 2005536



Junction box for the connection of cables and lines indoors and in outdoor areas. Rectangular design without entries. Suitable for wall and ceiling mounting with the option to fasten outside, inside or to mount via the corner domes. Particularly impact resistant with IK09. Transparent cover with quick lock, sealable. Made from halogen-free and UV-resistant materials.

Junction box according to DIN EN 60670. Impact resistance IK09 according to DIN EN 50102. Protection rating IP67 according to DIN EN 60529.



PC Polycarbonate

| Master data                        |                         |  |
|------------------------------------|-------------------------|--|
| Item number                        | 2005536                 |  |
| Type                               | X10C LGR-TR             |  |
| Description 1                      | Empty Enclosure         |  |
| Description 2                      | with transparent lid    |  |
| Manufacturer                       | OBO                     |  |
| Dimension                          | 190x150x125             |  |
| Colour                             | Grey / transparent      |  |
| Material                           | Polycarbonate           |  |
| Smallest sales unit                | 1                       |  |
| Unit of quantity                   | Piece                   |  |
| Weight                             | 58.5 kg                 |  |
| Weight unit                        | kg/100 pc.              |  |
| CO2 Footprint (GWP) Cradle-to-Gate | 2,2311 kg COe / 1 Piece |  |


# Technical data sheet

## Empty housing X 10


Item number: 2005536



### Dimensions

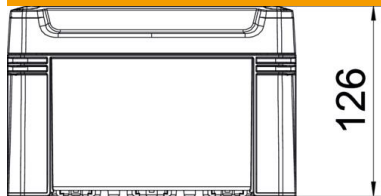

|        |        |
|--------|--------|
| Length | 191 mm |
| Width  | 151 mm |
| Height | 126 mm |

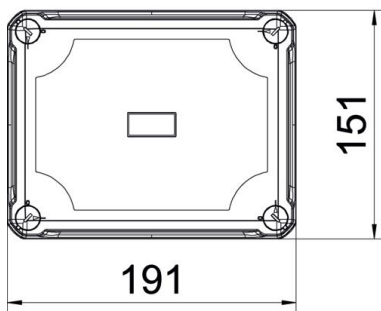

### Technical data

|                                   |                 |
|-----------------------------------|-----------------|
| Extension option                  | no              |
| Cover fastening                   | Screwed         |
| Shape                             | Square          |
| Suitable for outdoor use          | yes             |
| Clear internal dimensions         | 177x137x110 mm  |
| with lid                          | yes             |
| Mounting type                     | Surface-mounted |
| Protection rating                 | IP67            |
| Protection rating IK code         | IK09            |
| Protection class                  | II              |
| Permitted temperature range, max. | 60 °C           |
| Permitted temperature range, min. | -5 °C           |
| Transparent lid                   | yes             |
| Weatherproof                      | yes             |