


Technical data sheet

Dolü branch terminals, open on both sides, 12-pole

Item number: 2055023

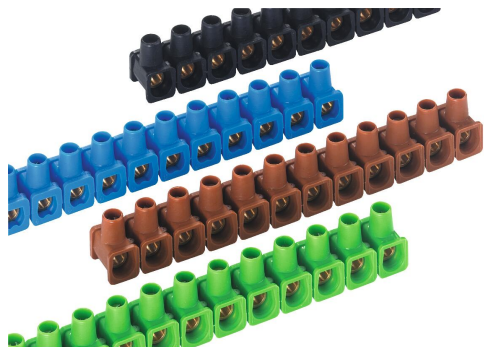

Sorted in colours black, brown, blue and yellow-green.

Terminals made of brass, screws of steel, galvanised and transparently passivated, 12-pole, strip separable into individual terminals, open on both sides.

Captive upwards screw.

Nominal cross-section $2.5 \div \text{mm}^2$.

Nominal voltage 380 V.

Nominal current 16 A.

Max. connectable cross-sections per terminal: $4 \times 2.5 \text{ mm}^2$, $5 \times 1.5 \text{ mm}^2$ or $6 \times 1 \text{ mm}^2$.

Delivery sorted by colour: 5 black, 2 blue, 2 yellow-green and 1 brown strip in each packaging unit.



PA Polyamide

Master data

Item number	2055023
Type	70 VDE
Description 1	Dolü branch terminal
Description 2	colours sorted
Manufacturer	OBO
Dimension	2.5 mm^2
Colour	(sorted)
Material	Polyamide
Smallest sales unit	10
Unit of quantity	Piece
Weight	2.5 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,1012 kg COe / 1 Piece

Item number: 2055023