

# Technical data sheet

## Anchor rod A4

Item number: 3497830



With the anchor rod and matching plastic wire sleeve, loads are fastened without spreading pressure in masonry walls using the VMS plus injection mortar. The system is also used for fastening in concrete ceilings. On concrete and full brick walls, the anchor rod is only mounted with the injection mortar VMU plus, without a wire sleeve.

The anchor rod VMU-A 8x110 mm is mounted using the plastic wire sleeve VM-SH 12x80 or VM-SH 16x85.

The VMU-A 10x130 mm anchor rod is mounted using the VM-SH 16x85 plastic wire sleeve.

The VMU-A 10x150 mm anchor rod is mounted using the VM-SH 16x85 or VM-SH 16x130 plastic wire sleeve.

The VMU-A 12x155 mm anchor rod is mounted using the VM-SH 20x85 plastic wire sleeve.

The scope of delivery comprises an anchor rod, washer and hexagonal nut.

**A4** Stainless steel

### Master data

Item number	3497830
Type	VMU-A 8-110A4
Description 1	Anchor rod
Description 2	for concrete and masonry
Manufacturer	OBO
Dimension	110x6,5
Colour	stainless steel
Material	Stainless steel
Smallest sales unit	10
Unit of quantity	Piece
Weight	4.35 kg
Weight unit	kg/100 pc.


# Technical data sheet

## Anchor rod A4

Item number: 3497830



### Dimensions

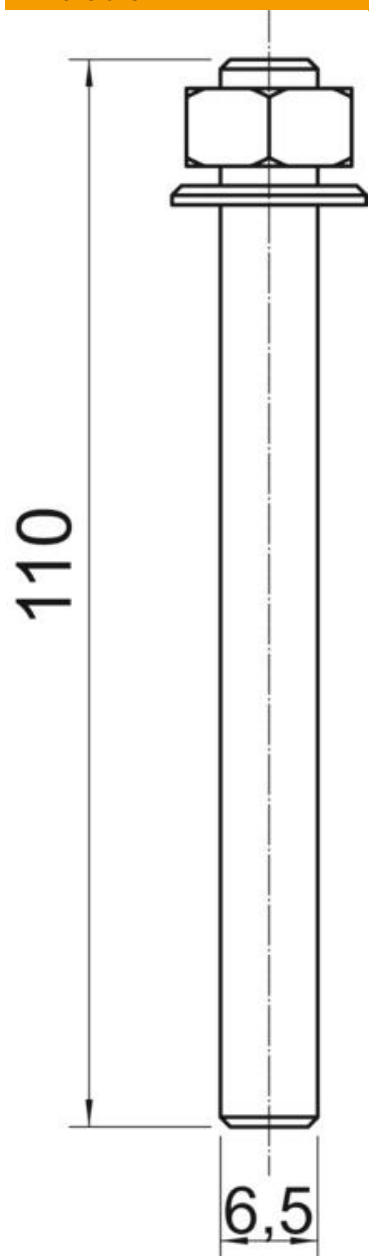

Length	110 mm
Dimension d	8 mm
Dimension L	110 mm

# Technical data sheet

## Anchor rod A4

Item number: 3497830



### Technical data

Thread	M8
Thread metric	8
Thread type	Metric
With external thread	yes
WAF	13
Depth marking	yes