

Technical data sheet

Earth rod for standard applications, hot galvanised, 20 mm

Item number: 5000750



- High corrosion resistance
- Zinc support approx. 130 µm
- With peg and bore for linking together
- Round pegs with two knurls
- Conforms to the requirements according to VDE 0185-305 (IEC 62305)
- Short-circuit current I_k (50 Hz), time 1 s, temp. max. 300 °C: 7.9 kA



St

Steel

FT

Hot-dip galvanised

Master data

Item number	5000750
Type	219 20 ST FT
Description 1	Earth rod
Description 2	standard
Manufacturer	OBO
Dimension	1,5m
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	5
Unit of quantity	Piece
Weight	370 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	10,1948 kg CO2e / 1 Piece


Technical data sheet

Earth rod for standard applications, hot galvanised, 20 mm

Item number: 5000750



Dimensions

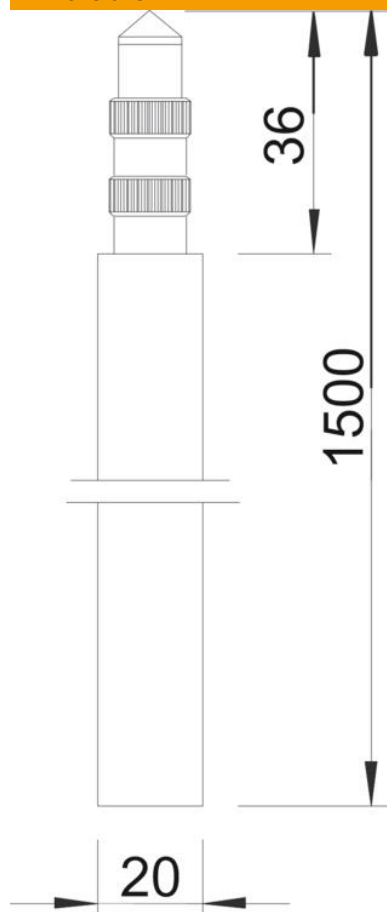

Length 1,500 mm

Technical data

Version for	Miscellaneous
Design earth rod	Standard
Lightning current carrying capacity	H/100 kA
Short-circuit current (50 HZ)(1 s; $\leq 300^{\circ}\text{C}$)	7.9 kA
Profile type	Round D=20 mm
Connection type	With pin/drill hole