

Technical data sheet

Earth rod V4A 20 mm

Item number: 5000858



- "BP" system (Bundespost)
- Very good contacting properties with soft metal inlay in the bore hole
- With peg and bore for linking together
- Conforms to the requirements according to VDE 0185-305 (IEC 62305) and DIN EN 62561-2
- Short circuit current I_k (50 Hz), time 1 s, max. temp. 300 °C: 4.5 kA (219 20 BP V4A)



A4 Stainless steel

Master data		
Item number	5000858	
Type	219 20 BP V4A	
Description 1	Earth rod	
Manufacturer	OBO	
Dimension	1m	
Material	Stainless steel	
Smallest sales unit	5	
Unit of quantity	Piece	
Weight	250 kg	
Weight unit	kg/100 pc.	
CO2 Footprint (GWP) Cradle-to-Gate	12,3875 kg CO2e / 1 Piece	


Technical data sheet

Earth rod V4A 20 mm

Item number: 5000858



Dimensions

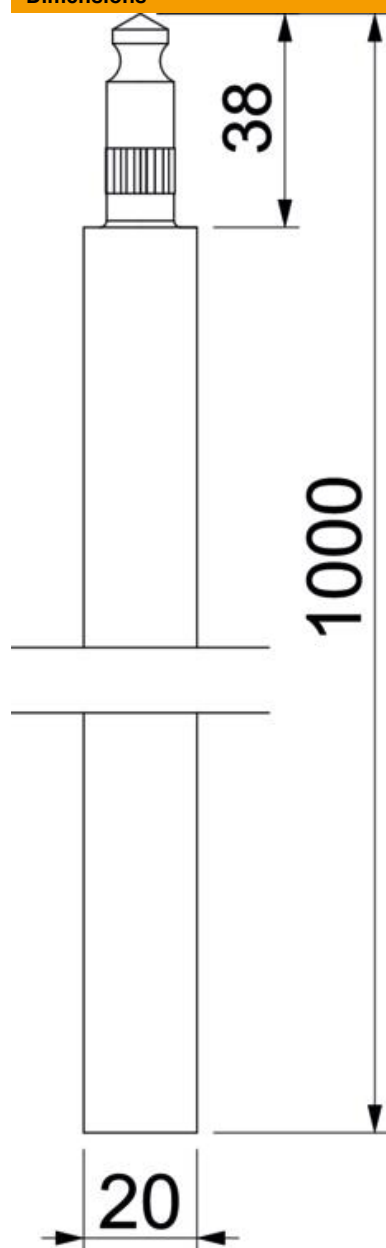

Length	1,000 mm
Dimension L	1,000 mm

Technical data sheet

Earth rod V4A 20 mm

Item number: 5000858



Technical data

Version for	Miscellaneous
Design earth rod	BP
Lightning current carrying capacity	H1/150 kA
Short-circuit current (50 HZ)(1 s; $\leq 300^{\circ}\text{C}$)	4.2 kA
Profile type	Round D=20 mm
Connection type	With pin/drill hole