

# Technical data sheet

## Round cable terminal to 25 mm<sup>2</sup> for 1801 VDE

Item number: 5015758



- For single or multi-wire cables 2.5–25 mm<sup>2</sup>
- For fine-wire cables to 16 mm<sup>2</sup> (max. Ø 7 mm)
- 1 division unit
- Lightning current carrying capacity 100 kA (10/350)
- Electrogalvanised steel
- Tension clamp with screw lock against self-loosening (e.g. required in industry and in explosion-protected areas)



**St** Steel

**G** Electrogalvanized

### Master data

|                                    |                            |
|------------------------------------|----------------------------|
| Item number                        | 5015758                    |
| Type                               | 1801 RK25                  |
| Description 1                      | Series terminal            |
| Description 2                      | for equipotential busbar   |
| Manufacturer                       | OBO                        |
| Dimension                          | 25mm <sup>2</sup>          |
| Material                           | Steel                      |
| Surface                            | Electrogalvanized          |
| Surface standard                   | EN ISO 19598 / EN ISO 4042 |
| Smallest sales unit                | 10                         |
| Unit of quantity                   | Piece                      |
| Weight                             | 1.323 kg                   |
| Weight unit                        | kg/100 pc.                 |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0439 kg CO2e / 1 Piece   |


# Technical data sheet

Round cable terminal to 25 mm<sup>2</sup> for 1801 VDE

Item number: 5015758



## Dimensions

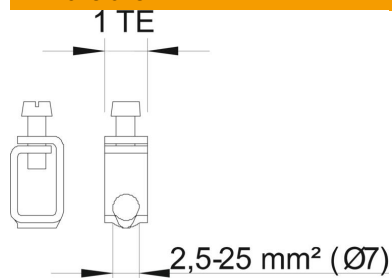

|       |       |
|-------|-------|
| Width | 12 mm |
|-------|-------|

## Technical data

|                                          |                        |
|------------------------------------------|------------------------|
| Connection options                       | 2.5-25 mm <sup>2</sup> |
| Suitable for ribbon conductor connection | no                     |
| Suitable for round cable connection      | yes                    |
| Suitable for sector conductor connection | no                     |
| Max. Conductor cross-section             | 25 mm <sup>2</sup>     |
| Dividing unit TE (10 mm)                 | 1                      |
| Suitable for busbar                      | Other                  |