

Technical data sheet

Protection Set PS 2-B+C TNC



Item number: 5089738



Protection set, lightning and surge arrester combination, type 1+2

- For lightning protection equipotential bonding to VDE 0185-305 (IEC 62305)
- Lightning current arresting capacity to 50 kA (10/350) per pole
- Arrester, connectable, including connecting bridges, labelled connection terminals
- Encapsulated, non-extinguishing arrester for use in distributor housings

Application: Mobile telecommunications systems and industrial systems with special requirements.



Master data		
Item number	5089738	
Type	PS 2-B+C TNC+FS	
Description 1	Protection set	
Description 2	2-pole with remote signalling	
Manufacturer	OBO	
Dimension	255V	
Smallest sales unit	1	
Unit of quantity	Piece	
Weight	106.3 kg	
Weight unit	kg/100 pc.	
CO2 Footprint (GWP) Cradle-to-Gate	2,558 kg COe / 1 Piece	


Technical data sheet

Protection Set PS 2-B+C TNC

Item number: 5089738



Dimensions

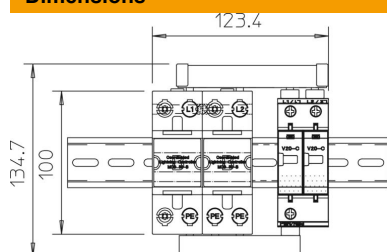

Technical data

Arrester surge current (8/20 μ s) [total]	100 kA
Response time	<25 ns
Pole version	2
Structural width in division units (division unit, 17.5 mm)	7
Operating temperature, max.	85 °C
Operating temperature, min.	-40 °C
Lightning surge current (10/350 μ s)	50 kA
Lightning surge current (10/350)	100 kA
Maximum continuous voltage (L-N)	255 V
Maximum continuous voltage (N-PE)	255 V
Maximum continuous voltage AC	255 V
Conductor cross-section, rigid (single-wire/multiwire), max.	50 mm ²
Conductor cross-section, rigid (single-wire/multiwire), min.	10 mm ²
Lightning protection zone LPZ	0→2
Max. mains-side overcurrent protection	500
Maximum back-up fuse	500 A
Maximum discharge current (8/20 μ s)	100 kA
Installation type	DIN rail 35 mm
Nominal discharge current (8/20 μ s)	50 kA
Nominal voltage AC (50/60 Hz)	230 V
Protection rating	IP20
Protection level	1,3
Signalling on device	Visual
SPD to EN 61643-11	Type 1+2
SPD to IEC 61643-1	Class I+II
Permitted temperature range, max.	85 °C
Permitted temperature range, min.	-40 °C