

Technical data sheet

Protection for field devices, 3-pole, 24 V, NPT

Item number: 5098392



Petrol Field Protector FDB for intrinsically safe measuring circuits and bus systems

- NPT connection technology
- Low protection level at high current load
- Easy mounting on field devices
- Negligible internal capacitance and inductance
- Stainless steel housing with pressure-resistant encapsulation
- ATEX approval: II 2(1) G Ex ia [ia Ga] IIC T4..T6 Gb (BVS 10 ATEX E 048)

Application: Flow sensors, temperature sensors



Master data		
Item number	5098392	
Type	FDB-3 24-N	
Description 1	Petrol Field Protector	
Description 2	with npt external thread	
Manufacturer	OBO	
Dimension	32V	
Smallest sales unit	1	
Unit of quantity	Piece	
Weight	19.5 kg	
Weight unit	kg/100 pc.	
CO2 Footprint (GWP) Cradle-to-Gate	0,0039 kg CO2e / 1 Piece	


Technical data sheet

Protection for field devices, 3-pole, 24 V, NPT


Item number: 5098392



Dimensions

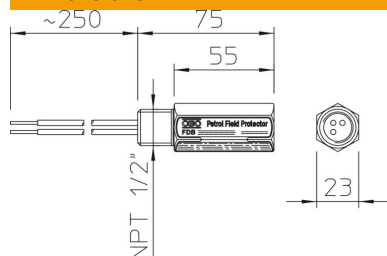

Technical data



Number of poles	3
Version for	3-pole; NPT
Earthing via:	Connection cable
EX approval	II 2(1)G Ex ia [ia Ga] IIC T4..T6 Gb (BVS 10 ATEX E 048)
Explosion-tested version	yes
Telecommunications contact	no
Housing material surge protection components	V2A
Total discharge current (8/20)	10 kA
Maximum continuous voltage AC	22 V
Maximum continuous voltage DC	32 V
Capacity (wire-wire)	< 17 pF
Capacity (wire-earth)	< 26 pF
Kategorie	Type 2+3 / C2+C1
Lightning protection zone LPZ	1→3
Mounting of input / output	1/2" NPT
Mounting of field / device side:	Connection cable 1.5 mm ² Length ~ 250 mm
Mounting type	Screw-on
Testing standard	IEC 61643-21
Protection rating	IP65/67
Protection level wire-wire	<80 V
Protection level wire-earth	<800 V
Signalling on device	None
SPD to IEC 61643-21	Class II+III / C2+C1
Impulse durability wire-wire	C1: 0,5 kV / 0,25 kA (8/20µs)
Impulse durability wire-earth	C2: 5 kV / 2,5 kA (8/20µs)
Permitted temperature range, max.	70 °C
Permitted temperature range, min.	-20 °C