

# Technical data sheet

## Roof conductor holder 55 mm

Item number: 5218314



- Suitable for bonding straight to flat roofs
- Conductor holder of polyamide
- Bottom section, hot-dip galvanised steel
- Bottom section Ø 100 mm

**PA** Polyamide

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 5218314                  |
| Type                               | 165 NBK 55               |
| Description 1                      | Roof conductor holder    |
| Manufacturer                       | OBO                      |
| Dimension                          | 55mm                     |
| Material                           | Polyamide                |
| Smallest sales unit                | 75                       |
| Unit of quantity                   | Piece                    |
| Weight                             | 13.54 kg                 |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,3801 kg CO2e / 1 Piece |

# Technical data sheet

## Roof conductor holder 55 mm


Item number: 5218314



### Dimensions



|             |        |
|-------------|--------|
| Length      | 100 mm |
| Dimension H | 55 mm  |

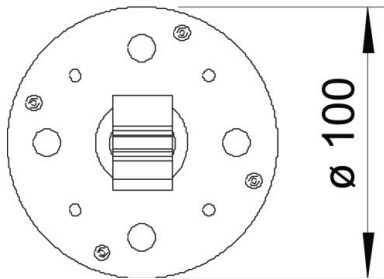

### Technical data

|                          |                       |
|--------------------------|-----------------------|
| Application              | Flat roof             |
| Conductor fastening type | With clamp clip       |
| Conductor diameter, max. | 10                    |
| Conductor diameter, min. | 8                     |
| Mounting type            | Adhesive              |
| Mounting height          | 55 mm                 |
| Fit                      | Rd 8-10 mm            |
| Material of the holder   | Plastic               |
| Material of the support  | Steel, hot galvanised |