# Technical data sheet

## Cover, for device installation trunking Rapid 45-2

## Item number: 6112410

Trunking cover for closing the device installation trunking of the Rapid 45-2 GA... series. The 2-piece cover consists of a PVC base profile and an aluminium panel profile.
Note:

For anodised aluminium trunking, covers and fittings, light colour differences caused by permitted scatter due to the material and process conditions cannot be avoided (according to DIN 17 611). The 45 mm devices can be clicked in directly. When using PC/ABS hood fittings, there may be colour differences due to the different materials.

Alu Aluminium

### Master data

| | |
|---|---|
| Item number | 6112410 |
| Type | GA-OT45RW |
| Description 1 | Cover |
| Description 2 | Rapid 45-2, aluminium |
| Manufacturer | OBO |
| Dimension | 45x2000 |
| Colour | Pure white; RAL 9010 |
| Material | Aluminium |
| Smallest sales unit | 2 |
| Unit of quantity | Metre |
| Weight | 47.45 kg |
| Weight unit | kg/100 m |
| CO2 Footprint (GWP) Cradle-to-Gate | 3,7428 kg CO2e / 1 Meter |

# Technical data sheet

## Cover, for device installation trunking Rapid 45-2

## Item number: 6112410

### Dimensions

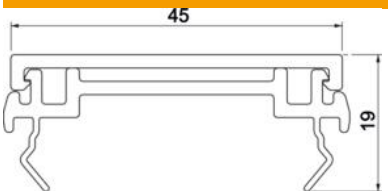


| | |
|---|---|
| Length | 2,000 mm |
| Width | 45 mm |
| Height | 19 mm |

### Technical data

| | |
|---|---|
| Version for | Smooth |
| Halogen-free | yes |
| Cover mounting type | Internal |
| Protection rating | IP40 |
| Protective film | yes |
| Protection rating IK code | IK10 |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | -15 °C |