

Technical data sheet

Device installation trunking Rapid 45-2, trunking width 165,
trunking height 53

Item number: 6112603



Aluminium device installation trunking complete with bottom and top part. The lower part is without base perforation.

Note:

For anodised device installation trunking and fittings made from aluminium, light colour differences caused by permitted scatter due to the material and process conditions cannot be avoided (according to DIN 17 611). 45 mm devices can be clicked in directly. When using PC/ABS hood fittings, there may be colour differences due to the different materials.



Alu Aluminium

EL Anodised

Master data

| | |
|------------------------------------|--------------------------------|
| Item number | 6112603 |
| Type | GA-53165EL |
| Description 1 | Device installation trunking |
| Description 2 | Rapid 45-2, 2-compartment,alum |
| Manufacturer | OBO |
| Dimension | 53x165x2000 |
| Colour | aluminium |
| Material | Aluminium |
| Surface | Anodised |
| Surface standard | |
| Smallest sales unit | 2 |
| Unit of quantity | Metre |
| Weight | 370.75 kg |
| Weight unit | kg/100 m |
| CO2 Footprint (GWP) Cradle-to-Gate | 42,9105 kg CO2e / 1 Meter |


Technical data sheet

Device installation trunking Rapid 45-2, trunking width 165,
trunking height 53

Item number: 6112603



Dimensions

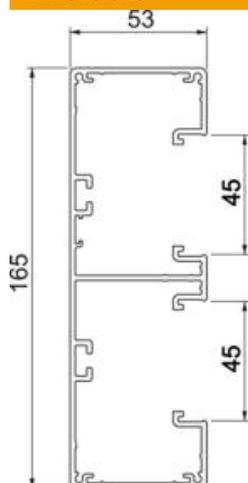

| | |
|--------|----------|
| Length | 2,000 mm |
| Width | 165 mm |
| Height | 53 mm |

Technical data

| | |
|-----------------------------------|----------------------|
| Number of covers | 2 |
| Number of insertable partitions | 2 |
| Rear panel version (inner side) | Continuous C profile |
| Rectangular shape | yes |
| Halogen-free | yes |
| Cable retaining clip | no |
| Duct connector | no |
| Cover mounting type | Internal |
| Mounting perforation in base | no |
| Usable cross-section | 6600 mm ² |
| Cover supplied | yes |
| Cover width | 45 mm |
| Cover width 2 | 45 mm |
| Protection rating | IP40 |
| Protective film | yes |
| Protection rating IK code | IK10 |
| Symmetrical | yes |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | -15 °C |