

# Technical data sheet

## Flush-mount unit for data technology, type C

Item number: 6119492



Installation unit to accommodate two type C data technology modules, suitable for installation in Rapid 80 device installation trunking systems and ISS service poles. The type C data technology support is suitable for accepting the following data connection modules: BTR (Keystone design): Cat. 6A module and UAE module; Corning: modules with Keystone seat; CobiNet: CobiDat KS module; Dätwyler: KS-T, KS-TS, MS-K and KU-T; EKU: E-Stone; Harting: Prelink Keystone Cat. 6A; Fixlink Keystone Cat. 6A; Komos: KDM 500 module; Leoni Kerpen: MegaLine Keystone Cat. 6A; OBO: Type ASM-C6A and ASM-C6A G; R&M: Cat. 6A with Keystone fastening; Rutenbeck: UM and UMflex; SETEC: UKJ and XKJ; Telegärtner: AMJ and UMJ.

Installation unit, consisting of:

- Mounting support, single, type 71MT1 45
  - Data technology support, straight outlet, type DTG-2C, colour: see table
  - Cover frame AR45, single, without labelling panel, colour: pure white
- For installation in Rapid 80 device installation trunking and ISS service poles.

**PC** Polycarbonate

### Master data

|                                    |                               |
|------------------------------------|-------------------------------|
| Item number                        | 6119492                       |
| Type                               | DTE-RW G2C1                   |
| Description 1                      | Inst.unit, data technology    |
| Description 2                      | f.2 connection modules type C |
| Manufacturer                       | OBO                           |
| Dimension                          | 84x84x59mm                    |
| Colour                             | Pure white; RAL 9010          |
| Material                           | Polycarbonate                 |
| Smallest sales unit                | 1                             |
| Unit of quantity                   | Piece                         |
| Weight                             | 5 kg                          |
| Weight unit                        | kg/100 pc.                    |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,4006 kg CO2e / 1 Piece      |


# Technical data sheet

## Flush-mount unit for data technology, type C

Item number: 6119492



### Dimensions

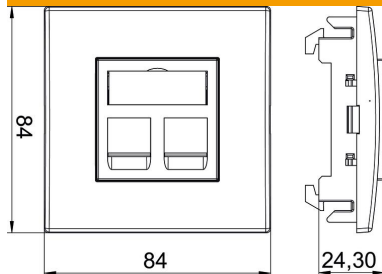

|        |       |
|--------|-------|
| Length | 84 mm |
| Width  | 84 mm |

### Technical data

|                      |                                     |
|----------------------|-------------------------------------|
| Surface version      | Matt                                |
| Labelling panel      | With labelling panel                |
| Halogen-free         | yes                                 |
| Hinged cover         | no                                  |
| Lamp-wire connector  | no                                  |
| With printed label   | no                                  |
| With dust protection | yes                                 |
| Mounting type        | Device installation duct            |
| Protection rating    | IP20                                |
| Depth                | 24.3 mm                             |
| Support ring         | no                                  |
| Transparent          | no                                  |
| Use                  | Modular jack                        |
| Strain relief option | no                                  |
| Combination          | Basic element with full cover plate |