


# Technical data sheet

33° socket, with earthing pin, encoded version, triple

Item number: 6120326

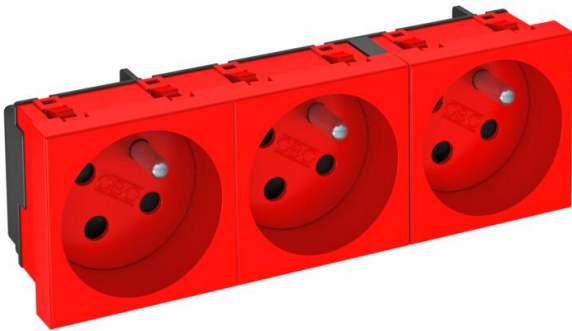

Socket with earthing pin Triple 33°, encoded version, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1. The socket can only be used in conjunction with an encoding pin, type CST-STD.  
Note: The encoding pin is not contained in the scope of supply.  
For installation in Rapid 45 trunking, device installation trunking, service poles, underfloor systems and desk boxes.



PC Polycarbonate

| Master data                        |                           |  |
|------------------------------------|---------------------------|--|
| Item number                        | 6120326                   |  |
| Type                               | STD-F3K SRO3              |  |
| Description 1                      | Socket 33°, triple, coded |  |
| Description 2                      | with earth pin            |  |
| Manufacturer                       | OBO                       |  |
| Dimension                          | 250V, 10/16A              |  |
| Colour                             | Signal red; RAL 3001      |  |
| Material                           | Polycarbonate             |  |
| Smallest sales unit                | 1                         |  |
| Unit of quantity                   | Piece                     |  |
| Weight                             | 10.5 kg                   |  |
| Weight unit                        | kg/100 pc.                |  |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,5581 kg CO2e / 1 Piece  |  |



# Technical data sheet

33° socket, with earthing pin, encoded version, triple

Item number: 6120326



## Dimensions

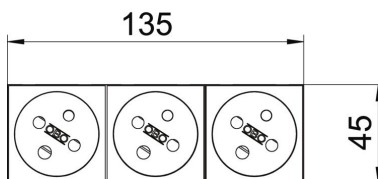

|        |        |
|--------|--------|
| Width  | 135 mm |
| Height | 45 mm  |

## Technical data

|                                                  |                              |
|--------------------------------------------------|------------------------------|
| Cover                                            | Central plate                |
| Closable                                         | no                           |
| Connection type                                  | Screwless terminal           |
| Number of units                                  | 3                            |
| Number of modules (for modular construction)     | 0                            |
| Number of switchable sockets                     | 0                            |
| Number of poles                                  | 2                            |
| Printed label/coding                             | Without printing             |
| Version for                                      | Triple 33°                   |
| Surface version                                  | Matt                         |
| Version for                                      | Protective contact pin       |
| Ejection mechanism                               | no                           |
| Fastening type                                   | Lock                         |
| Labelling panel                                  | no                           |
| Operating temperature, max.                      | 40 °C                        |
| Operating temperature, min.                      | -5 °C                        |
| increased touch protection                       | yes                          |
| Error current protection                         | no                           |
| For more difficult conditions (according to VDE) | no                           |
| Halogen-free                                     | yes                          |
| Insulated installation                           | no                           |
| Hinged cover                                     | no                           |
| Coding                                           | yes                          |
| Warning light                                    | no                           |
| With on/off switch                               | no                           |
| With fine-wire fuse                              | no                           |
| With functional lighting                         | no                           |
| With orientation lighting                        | no                           |
| Mounting type                                    | Device installation duct     |
| Nominal voltage                                  | 250 V                        |
| Nominal current                                  | 16 A                         |
| Protection rating                                | Other                        |
| Special power supply                             | Without special power supply |
| Socket version                                   | NF                           |
| Socket angle                                     | 33°                          |

# Technical data sheet

33° socket, with earthing pin, encoded version, triple

Item number: 6120326



## Technical data

|                        |       |
|------------------------|-------|
| Depth                  | 39 mm |
| Transparent            | no    |
| Rotated central insert | yes   |
| Surge protection       | no    |