

# Technical data sheet

0° socket, Connect 45, with earthing pin, triple

Item number: 6120572



Earthing pin socket with connection to side, Triple 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 45 device installation trunking systems.

For installation in Rapid 45 trunking, device installation trunking, service poles, underfloor systems and desk boxes.



PC Polycarbonate

## Master data

|                                    |                            |
|------------------------------------|----------------------------|
| Item number                        | 6120572                    |
| Type                               | STD-F0C RW3                |
| Description 1                      | Socket 0°, triple          |
| Description 2                      | with earth pin, Connect 45 |
| Manufacturer                       | OBO                        |
| Dimension                          | 250V, 10/16A               |
| Colour                             | Pure white; RAL 9010       |
| Material                           | Polycarbonate              |
| Smallest sales unit                | 1                          |
| Unit of quantity                   | Piece                      |
| Weight                             | 13.9 kg                    |
| Weight unit                        | kg/100 pc.                 |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,5793 kg CO2e / 1 Piece   |



# Technical data sheet

0° socket, Connect 45, with earthing pin, triple

Item number: 6120572



## Dimensions

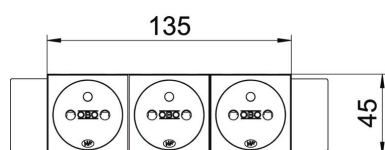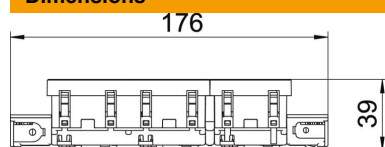

|        |        |
|--------|--------|
| Width  | 176 mm |
| Height | 45 mm  |

## Technical data

|                                                  |                              |
|--------------------------------------------------|------------------------------|
| Cover                                            | Central plate                |
| Closable                                         | no                           |
| Connection type                                  | Screwless terminal           |
| Number of units                                  | 3                            |
| Number of modules (for modular construction)     | 0                            |
| Number of switchable sockets                     | 0                            |
| Number of poles                                  | 2                            |
| Printed label/coding                             | Without printing             |
| Version for                                      | Triple 0°                    |
| Surface version                                  | Matt                         |
| Version for                                      | Protective contact pin       |
| Ejection mechanism                               | no                           |
| Fastening type                                   | Lock                         |
| Labelling panel                                  | no                           |
| Operating temperature, max.                      | 40 °C                        |
| Operating temperature, min.                      | -5 °C                        |
| increased touch protection                       | yes                          |
| Error current protection                         | no                           |
| For more difficult conditions (according to VDE) | no                           |
| Halogen-free                                     | yes                          |
| Insulated installation                           | no                           |
| Hinged cover                                     | no                           |
| Coding                                           | no                           |
| Warning light                                    | no                           |
| With on/off switch                               | no                           |
| With fine-wire fuse                              | no                           |
| With functional lighting                         | no                           |
| With orientation lighting                        | no                           |
| Mounting type                                    | Device installation duct     |
| Nominal voltage                                  | 250 V                        |
| Nominal current                                  | 16 A                         |
| Protection rating                                | Other                        |
| Special power supply                             | Without special power supply |
| Socket version                                   | NF                           |
| Socket angle                                     | 0°                           |

# Technical data sheet

0° socket, Connect 45, with earthing pin, triple

Item number: 6120572



## Technical data

|                        |       |
|------------------------|-------|
| Depth                  | 39 mm |
| Transparent            | no    |
| Rotated central insert | no    |
| Approvals              | VDE   |
| Surge protection       | no    |