

Technical data sheet

Service pole, type ISSHS140250

Item number: 6290020




ISS aluminium service pole, 2-compartment, with a 76.5 mm system opening.

Empty, equippable with standard devices (socket, telephone, etc.), max. 4 devices.

Fixing possible directly on floor. Accessory mounting boxes to be ordered separately.

The service pole is suitable for accepting front-locking accessory mounting boxes of the series 71GD.... The installation of a partition of type GA-TW (6279711) and the installation of the cover clip, type KL80A, are possible as an option.



Alu Aluminium

Master data

| | |
|------------------------------------|---------------------------|
| Item number | 6290020 |
| Type | ISSHS140250RW |
| Description 1 | Service pole |
| Description 2 | floor |
| Manufacturer | OBO |
| Dimension | 250x130x140 |
| Colour | Pure white; RAL 9010 |
| Material | Aluminium |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 175 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 22,0798 kg CO2e / 1 Piece |



Technical data sheet

Service pole, type ISSHS140250

Item number: 6290020



Dimensions

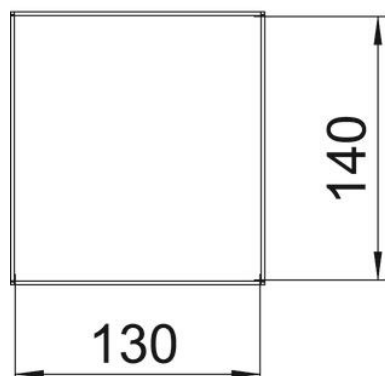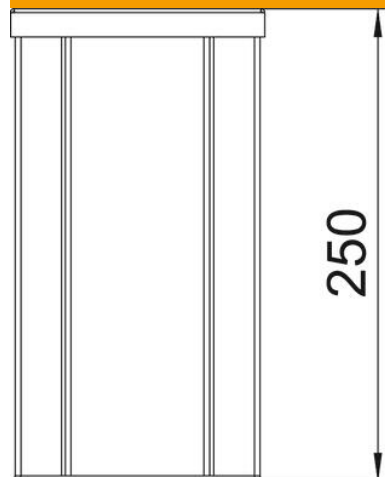

| | |
|--------|--------|
| Length | 250 mm |
| Width | 130 mm |
| Height | 140 mm |

Technical data

| | |
|-------------------------------|--------------|
| Number of usable covers | 2 |
| Number of compartments | 2 St. |
| Version for | Double-sided |
| Fastening type | Bolts |
| Floor mounting | yes |
| Ceiling mounting | no |
| Continuous profile | yes |
| Halogen-free | yes |
| Cable entry | Bottom |
| Cover width | 76.5 mm |
| Changes according to location | no |
| Pole shape | Rectangular |
| Pole height, min. | 250 mm |
| Adjustable | no |
| Pre-wired | no |