Technical data sheet

TP support / wall and support bracket FT

Item number: 6364659





TP support/bracket for fastening to horizontal concrete ceilings and walls. If the profile is fastened directly to the ceiling or the profile is screwed together as head reinforcement, then, for reasons of stability, always use the spacer, type DS









Steel



Hot-dip galvanised

Master data


Item number	6364659		
Type	TPSA 145 FT		
Description 1	TP wall and support bracket		
Description 2	use as support and bracket		
Manufacturer	OBO		
Dimension	B145mm		
Colour	zinc		
Material	Steel		
Surface	Hot-dip galvanised		
Surface standard	DIN EN ISO 1461		
Smallest sales unit	1		
Unit of quantity	Piece		
Weight	33 kg		
Weight unit	kg/100 pc.		
CO2 Footprint (GWP) Cradle-to- Gate	0,8838 kg CO2e / 1 Piece		

Technical data sheet

TP support / wall and support bracket FT





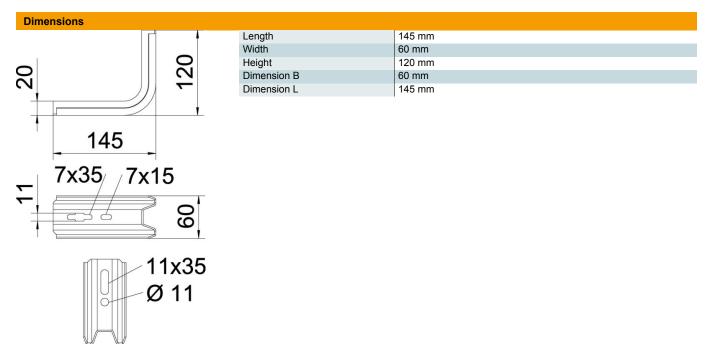

Technical data		
	Version for	Wall and support bracket
	F in kN	1.5 kN
	Maintain electrical functions	no
	for width max.	100 mm
	for width min.	100
	Rustproof steel, pickled	no

Characteristic anchor load values for TP bracket								
	Wall fastening							
		Max. load [kN]						
		Bracket width [mm]						
	Anchor type	145	195	245	345			
	BZ3 10x90/0-30	1.3	0.93	0.60	0.68			

The load capacity values increase considerably when used in uncracked concrete. The stated values are based on cracked concrete of compressive strength C20/25. Please comply with the installation conditions of ETA(anchors).