

# Technical data sheet

UDHOME-ONE floor socket, without floor covering recess,  
freely equippable, stainless steel  
Item number: 7368280



Square floor socket for use in dry-care systems and screed floors in indoor areas. Installation housing with pre-marked insertion openings for pipes (M20/M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. The minimum installation depth is 75 mm, the height-adjustment range +30 mm. Frame and cover made of stainless steel and visible in the floor covering. Cover with decorative plate. Empty housing for a Modul45® installation device and a data socket. When delivered, the item is closed with a blind plate.



A2 Stainless steel

## Master data

|                                    |                                |
|------------------------------------|--------------------------------|
| Item number                        | 7368280                        |
| Type                               | UDHOME-ONE GV                  |
| Description 1                      | Floor socket                   |
| Description 2                      | unequipped, St.Steel decor lid |
| Manufacturer                       | OBO                            |
| Dimension                          | 140x140x75                     |
| Material                           | Stainless steel                |
| Smallest sales unit                | 1                              |
| Unit of quantity                   | Piece                          |
| Weight                             | 220 kg                         |
| Weight unit                        | kg/100 pc.                     |
| CO2 Footprint (GWP) Cradle-to-Gate | 11,8594 kg CO2e / 1 Piece      |


# Technical data sheet

UDHOME-ONE floor socket, without floor covering recess,  
freely equippable, stainless steel


Item number: 7368280



## Dimensions

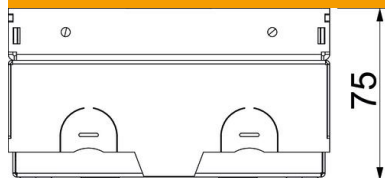

|             |        |
|-------------|--------|
| Length      | 140 mm |
| Width       | 140 mm |
| Height      | 75 mm  |
| Dimension h | 75 mm  |

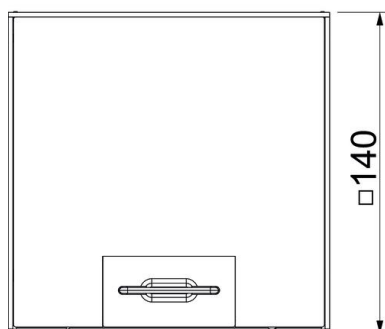

## Technical data

|                                                   |                         |
|---------------------------------------------------|-------------------------|
| Number of installable devices                     | 2                       |
| Cable outlet version                              | Swivellable cord outlet |
| Equipment                                         | Empty housing           |
| Floor covering protection frame                   | no                      |
| Floor care                                        | Dry                     |
| Cover version                                     | Decorative plate        |
| Seal installation option                          | no                      |
| Application when used                             | 6.101.1 Dry floor care  |
| Application when unused                           | 6.101.1 Dry floor care  |
| Floor height, max.                                | 105 mm                  |
| Floor height, min.                                | 75 mm                   |
| Suitable for raised floor installation            | yes                     |
| Suitable for screed-flush closed underfloor ducts | no                      |
| Suitable for screed-covered underfloor ducts      | no                      |
| Suitable for cavity floor installation            | yes                     |
| Suitable for wet care                             | no                      |
| Suitable for underfloor ducts                     | no                      |
| Device support to accept mounting boxes           | no                      |
| With floor covering recess                        | no                      |
| Protection rating (IP) when used                  | IP20                    |
| Protection rating (IP) when unused                | IP40                    |
| Protection rating IK code                         | IK10                    |
| Heavy-duty version                                | no                      |
| Vertical load, large area                         | to 15,000 N             |

# Technical data sheet

UDHOME-ONE floor socket, without floor covering recess,  
freely equippable, stainless steel  
Item number: 7368280



## Technical data

|                           |            |
|---------------------------|------------|
| Vertical load, small area | to 3,000 N |
| Approvals                 | VDE        |
| Opening mechanism         | Handle     |