## **Technical data sheet**

UDHOME2 floor socket, with cord outlet, without floor covering recess, unequipped, stainless steel ltem number: 7368342





Square floor socket for use in dry-care cavity and screed floors in indoor areas. Installation housing with pre-marked insertion openings for pipes (M20/M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. The minimum installation depth is 100 mm, the height-adjustment range 35 mm.Frame and cover made of stainless steel and visible in the floor covering. Empty housing for up to 2 Modul 45® devices in the mounting support and 2 data sockets in the optional data technology support.





Stainless steel


## Master data

7368342
UDHOME2 GV
Floor socket
unequipped
OBO
140x140x110
Stainless steel
1
Piece
220 kg
kg/100 pc.
12,8901 kg CO2e / 1 Piece

## **Technical data sheet**

UDHOME2 floor socket, with cord outlet, without floor covering recess, unequipped, stainless steel Item number: 7368342



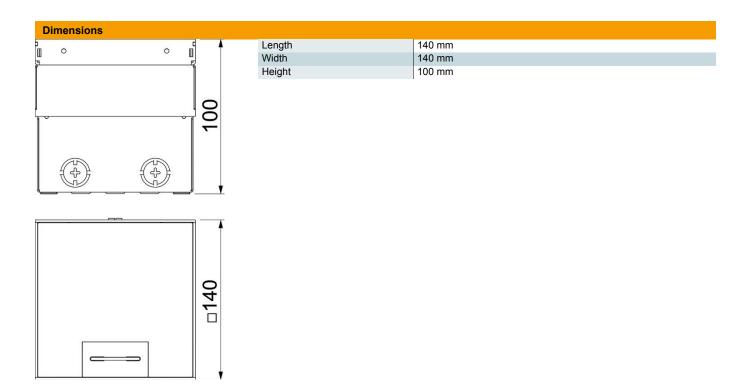

	data

Number of installable devices	2
Version for	Square
Cable outlet version	Swivellable cord outlet
Equipment	Empty housing
Floor covering protection frame	no
Floor care	Dry
Cover version	Decorative plate
Seal installation option	no
Application when used	6.101.1 Dry floor care
Application when unused	6.101.1 Dry floor care
Floor height, max.	135 mm
Floor height, min.	100 mm
Suitable for raised floor installation	yes
Suitable for screed-flush closed underfloor ducts	no
Suitable for screed-covered underfloor ducts	no
Suitable for cavity floor installation	yes
Suitable for wet care	no
Suitable for underfloor ducts	no
Device support to accept mounting boxes	no
With floor covering recess	no

## **Technical data sheet**

UDHOME2 floor socket, with cord outlet, without floor covering recess, unequipped, stainless steel Item number: 7368342



Technical data		
	Nominal size for device installation units	2
	Standard	EN 50085-2-2
	Frame version	Floor covering contact edge
	Protection rating (IP) when used	IP20
	Protection rating (IP) when unused	IP40
	Protection rating IK code	IK10
	Heavy-duty version	no
	Vertical load, large area	to 15,000 N
	Vertical load, small area	to 3,000 N
	Approvals	VDE
	Opening mechanism	Handle