


# Technical data sheet

## Mounting lid 350, nominal size 6

Item number: 7400509

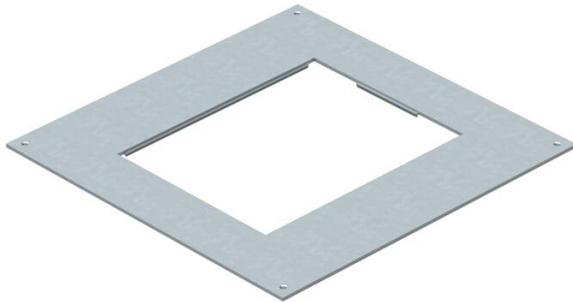

Mounting lid for underfloor junction and branch box of type UZD350-3/4 for the installation of an installation unit of nominal size 6. Installation opening 3 mm recessed for later blanking lock with lid blanking plate.



**St** Steel

**FS** Strip galvanized

### Master data

|                                    |                           |
|------------------------------------|---------------------------|
| Item number                        | 7400509                   |
| Type                               | DUG 350-3 6               |
| Description 1                      | Mounting lid              |
| Description 2                      | 350-2/3 for GES6          |
| Manufacturer                       | OBO                       |
| Dimension                          | 383x383x4                 |
| Material                           | Steel                     |
| Surface                            | Strip galvanized          |
| Surface standard                   | DIN EN 10346              |
| Smallest sales unit                | 1                         |
| Unit of quantity                   | Piece                     |
| Weight                             | 290 kg                    |
| Weight unit                        | kg/100 pc.                |
| CO2 Footprint (GWP) Cradle-to-Gate | 11,2092 kg CO2e / 1 Piece |


# Technical data sheet

## Mounting lid 350, nominal size 6

Item number: 7400509



### Dimensions

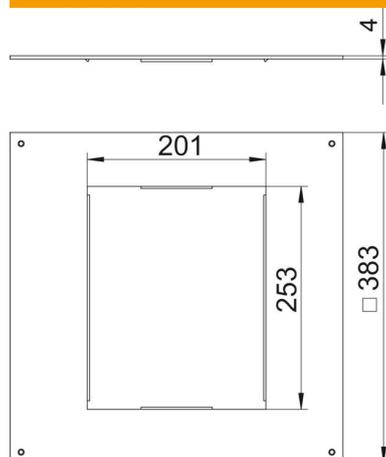

|             |        |
|-------------|--------|
| Length      | 383 mm |
| Width       | 383 mm |
| Height      | 4 mm   |
| Dimension a | 201 mm |
| Dimension A | 383 mm |
| Dimension b | 253 mm |

### Technical data

|   |             |
|---|-------------|
| Mounting opening cover                            | no          |
| Floor care  | Dry         |
| Seal installation option                          | no          |
| Installation opening for on-floor tank            | no          |
| Suitable for screed-flush closed underfloor ducts | no          |
| Suitable for screed-covered underfloor ducts      | yes         |
| Trunking width, max.                              | 350 mm      |
| Trunking width, min.                              | 190 mm      |
| Material thickness                                | 4 mm        |
| Mounting opening                                  | Rectangular |
| Nominal size                                      | 350 mm      |
| Nominal size for device installation units        | 6           |
| Heavy-duty version                                | no          |