

# Technical data sheet

## GES9/10 service trunking for OKA-T, 3-compartment

Item number: 7402290



Square flushfloor installation unit for mounting in an OKA-T trunking system. With mounting support to accept up to three APMT5 cover plates.  
Service outlet with handle clamp for mounting in a OKA-T trunking system. With mounting support for receiving up to three APMT5 cover plates.



PA Polyamide

### Master data

Item number	7402290
Type	GES9 10OK U 7011
Description 1	Service outlet
Description 2	with univ. mounting for OKA/T
Manufacturer	OBO
Dimension	264x264x67
Colour	Iron grey; RAL 7011
Material	Polyamide
Smallest sales unit	1
Unit of quantity	Piece
Weight	211 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	5,7547 kg CO2e / 1 Piece


# Technical data sheet

## GES9/10 service trunking for OKA-T, 3-compartment

Item number: 7402290



### Dimensions

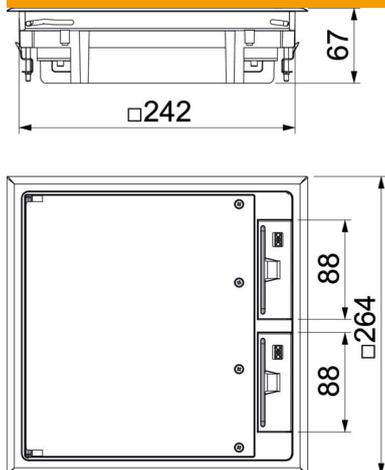

### Technical data

Cable outlet version	Swivellable cord outlet
Seal installation option	no
Suitable for raised floor installation	yes
Suitable for screed-flush closed underfloor ducts	no
Suitable for cavity floor installation	yes
Suitable for wet care	no
Clamping range D, max.	36 mm
Clamping range D, min.	14 mm
Opening mechanism	Handle
Floor covering thickness	10 mm