# Technical data sheet

## GES9-3B service outlet with handle clamp

## Item number: 7405077

Service outlet with handle clamp for up to 12 individual Modul 45 devices in 3 UT4 universal supports, use in trunking systems and system floors for indoor use.

Floor covering recess in the hinged cover pre-adjusted to 5 mm, if necessary adjustable to 10 mm.
Up to 9 installation devices with 50 mm central plate can be inserted.
Service outlet with handle clamp, 3-compartment, for the installation of MT9 mounting support. Three type APMT5 cover plates can be installed. Floor covering recess in the hinged cover pre-adjusted to 5 mm, if necessary adjustable to 10 mm.

PA Polyamide

### Master data

| | |
|---|---|
| Item number | 7405077 |
| Type | GES9-3B U 7011 |
| Description 1 | Service outlet |
| Description 2 | for universal mounting |
| Manufacturer | OBO |
| Dimension | 264x264x67 |
| Colour | Iron grey; RAL 7011 |
| Material | Polyamide |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 205 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 6,2179 kg CO2e / 1 Piece |

# Technical data sheet

## GES9-3B service outlet with handle clamp

## Item number: 7405077

### Dimensions

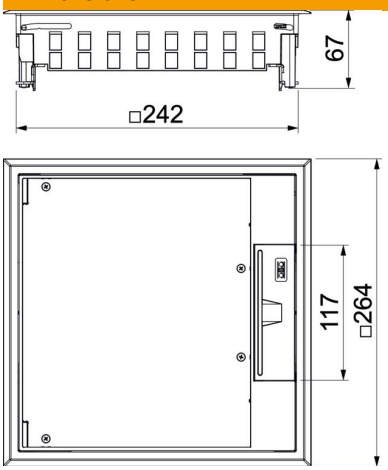


| | |
|---|---|
| Length | 264 mm |
| Width | 264 mm |
| Height | 67 mm |
| Dimension h | 73 mm |

### Technical data

| | |
|---|---|
| Number of installable devices | 12 |
| Number of mounting boxes | 3 |
| Version for | Square |
| Cable outlet version | Swivellable cord outlet |
| Floor covering protection frame | yes |
| Floor care | Dry |
| Seal installation option | no |
| Floor height, min. | 73 mm |
| Suitable for raised floor installation | yes |
| Suitable for screed-flush closed underfloor ducts | no |
| Suitable for screed-covered underfloor ducts | yes |
| Suitable for cavity floor installation | yes |
| Suitable for wet care | no |
| Suitable for underfloor box | 250/350 |
| Suitable for underfloor ducts | yes |
| Device support to accept mounting boxes | yes |
| Length of external dimensions | 264 mm |
| Length of installation dimensions | 244 mm |
| With floor covering recess | yes |
| Nominal size for device installation units | 9 |
| Frame version | Carpet protection frame |
| Protection rating (IP) when used | IP20 |
| Protection rating (IP) when unused | IP40 |
| Protection rating IK code | IK08 |
| Heavy-duty version | no |
| Clamping range D, max. | 76 mm |
| Clamping range D, min. | 8 mm |
| Installation system type | UT4 |

# Technical data sheet

## GES9-3B service outlet with handle clamp

## Item number: 7405077

| Technical data | |
|---|---|
| Vertical load, large area | to 5,000 N |
| Vertical load, small area | to 3,000 N |
| Approvals | VDE |
| Opening mechanism | Handle |
| Floor covering thickness | 5 mm |
| Floor covering thickness max. | 10 mm |