

# Technical data sheet

## GESRA9/10 service outlet with handle clamp

Item number: 7405580



Service outlet with handle clamp for up to 12 individual Modul 45 devices in 3 UT4 universal supports, use in duct systems and system floors for indoor use.

Up to 9 installation devices with 50 mm central plate can be inserted.  
Service outlet with handle clamp, 3-compartment, for the installation of MT9 mounting support. Three type APMT5 cover plates can be installed.



**AIG** Cast aluminium

### Master data

Item number	7405580
Type	GESRA9 10U
Description 1	Service outlet
Description 2	for universal mounting
Manufacturer	OBO
Dimension	Ø323x70
Material	Cast aluminium
Smallest sales unit	1
Unit of quantity	Piece
Weight	120.5 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	18,3614 kg CO2e / 1 Piece


# Technical data sheet

## GESRA9/10 service outlet with handle clamp

Item number: 7405580



### Dimensions

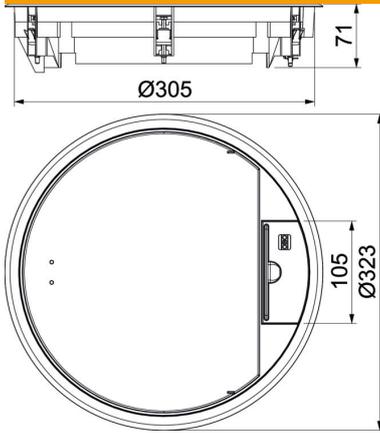

### Technical data

Number of installable devices	12
Number of mounting boxes	3
Version for	Round
Floor covering protection frame	yes
Floor care	Dry
Seal installation option	no
Floor height, min.	78 mm
Suitable for raised floor installation	yes
Suitable for screed-covered underfloor ducts	yes
Suitable for cavity floor installation	yes
Suitable for wet care	no
Suitable for underfloor box	350
Suitable for underfloor ducts	yes
Device support to accept mounting boxes	yes
With floor covering recess	yes
Nominal size for device installation units	R9
Protection rating (IP) when used	IP20
Protection rating (IP) when unused	IP40
Protection rating IK code	IK10
Heavy-duty version	no
Clamping range D, max.	33 mm
Clamping range D, min.	3 mm
Installation system type	UT4
Vertical load, large area	to 5,000 N
Vertical load, small area	to 3,000 N
Approvals	VDE
Opening mechanism	Handle
Floor covering thickness	10 mm