


# Technical data sheet

## Underfloor box UGD350-3 for GES9/55

Item number: 7410062

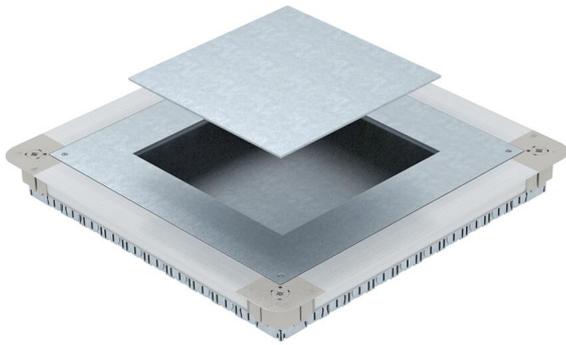

Underfloor accessory box with mounting lid and lid blanking plate with sheet steel side walls. For the installation of a square GES9 55 service outlet in screed heights of 55 mm or more. Height can be infinitely adjusted to the nominal screed height and the screed can be worked flush to the screed scraping edge. With 10 x M20, 3 x M25, 7 x M32 pipe insertion openings on each side. Usable pipe size at a system height of 55 mm: M20.



**St** Steel

**FS** Strip galvanized

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 7410062                  |
| Type                               | UGD55 350-3 9R           |
| Description 1                      | Underfloor box empty     |
| Description 2                      | for GES9/55UV            |
| Manufacturer                       | OBO                      |
| Dimension                          | 467x467x55               |
| Material                           | Steel                    |
| Surface                            | Strip galvanized         |
| Surface standard                   | DIN EN 10346             |
| Smallest sales unit                | 1                        |
| Unit of quantity                   | Piece                    |
| Weight                             | 790 kg                   |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 38,524 kg CO2e / 1 Piece |


# Technical data sheet

## Underfloor box UGD350-3 for GES9/55



Item number: 7410062

### Dimensions

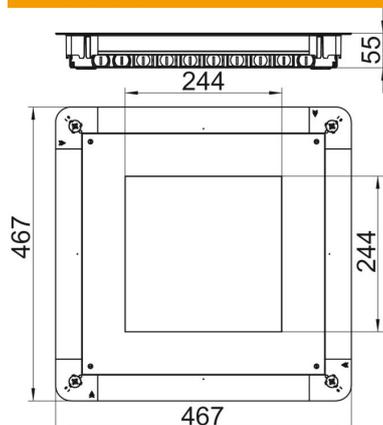

|             |        |
|-------------|--------|
| Length      | 467 mm |
| Width       | 467 mm |
| Height      | 55 mm  |
| Dimension a | 244 mm |
| Dimension A | 467 mm |
| Dimension B | 467 mm |
| Dimension b | 244 mm |
| Dimension h | 55 mm  |

### Technical data

|   |                                 |
|---|---------------------------------|
| Expansion option                                  | For installation of accessories |
| Floor plate                                       | yes                             |
| Lowerable to be flush-floor                       | yes                             |
| Floor care  | Dry                             |
| Cover version                                     | Square                          |
| Seal installation option                          | no                              |
| Installation opening for on-floor tank            | no                              |
| Installation opening for flush-mount unit         | Square                          |
| Decouplable                                       | no                              |
| Screed height, max.                               | 80 mm                           |
| Screed height, min.                               | 55 mm                           |
| For pipe connection                               | yes                             |
| Suitable for screed-flush closed underfloor ducts | no                              |
| Suitable for screed-covered underfloor ducts      | no                              |
| Suitable for underfloor ducts                     | no                              |
| Trunking width, max.                              | 350 mm                          |
| Trunking width, min.                              | 190 mm                          |
| Nominal size                                      | 350 mm                          |
| Nominal size for device installation units        | 9                               |
| Height-adjustment range, max.                     | 80 mm                           |
| Height-adjustment range, min.                     | 55 mm                           |