


# Technical data sheet

90° bend for PYROLINE® Con S I90/E30 fire protection duct  
Item no. 7215607

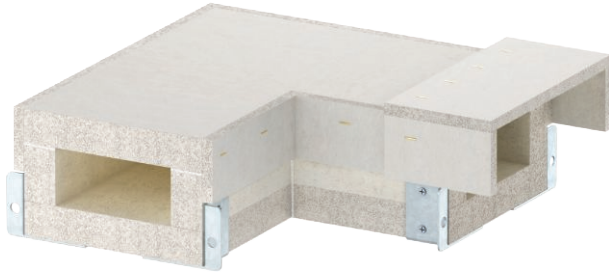

90° bend for PYROLINE® Con S I90/E30 fire protection duct, consisting of fibreglass lightweight concrete which is resistant to water and frost for the creation of horizontal changes of direction of the duct. Mounted connectors ensure quick mounting in situ, whilst loosely placed covers ensure quick inspection and reassignment.

Including connection screws and sealing strip.



Fibreglass lightweight concrete


## Product description

Product text, scope of delivery | Including connection screws and sealing strip.

## Master data

Item no.	7215607
Type	BSKH-FB090511
Description 1	90° bend
Description 2	for BSKH I90/E30
Dimension	50x110
Colour	Grey
Material	Glass-fibre lightweight concrete
Smallest sales unit (VG)	1 Piece
Weight	630,00 kg/100 pc.

## Technical data

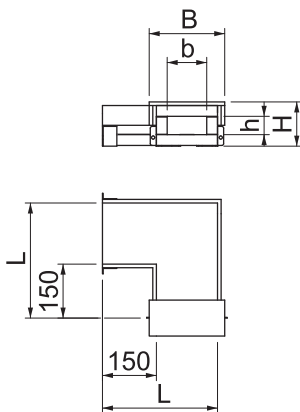

Internal dimensions	50 x 110 mm
External dimensions	120 x 210 mm
Dimension B	210,00 mm
Dimension H	120,00 mm
Dimension L	330,00 mm
Dimension b	110,00 mm
Dimension h	50,00 mm
Number of flammable sides	4
Cover fastening	Loose
Fire resistance class E – function maintenance	30
Fire resistance class I – installation duct	90
With perforation	<input type="checkbox"/>
Partitions possible	<input checked="" type="checkbox"/>
Jacketing	Without
Material of the insulation	Glass-fibre lightweight concrete
Angle of the bend	90,00 °