


# Technical data sheet

## Cross-connector for Rd 8–10 x Rd 16

Item no. 5312809

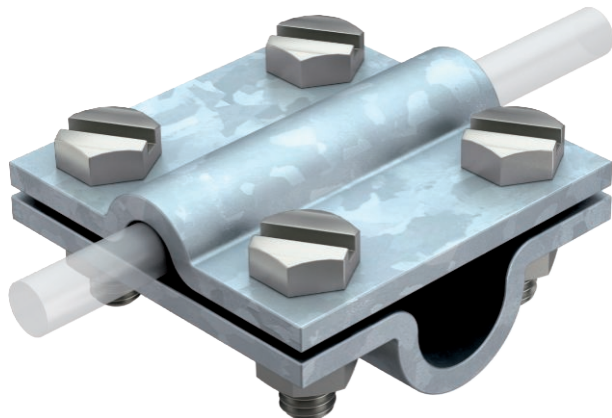

- Meets the requirements of VDE 0185-305-3 (IEC/ EN 62305-3)
- Fit: Rd 8-10 x Rd 16 / FL 30
- Mounted with 4 hexagonal bolts M8 x 25 and 4 hexagonal nuts M8 (F)





<b>St</b>	Steel
<b>FT</b>	Hot-dip galvanised

### Product description

### Master data

Item no.	5312809
Type	253 10X16
Description 1	Cross-connectors
Dimension	8-10mm
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Weight	29,80 kg/100 pc.

### Technical data



Dimension A	60,00 mm
Dimension B	60,00 mm
Type of fastening screw	Hex set screw
Type of connector	Cross-connectors
Lightning current carrying capacity	H/100 kA
Suitable for connection	Round conductor Rd 8-10 / Rd 16
Fit	Rd 8-10 x 16 mm
Intermediate plate	<input type="checkbox"/>

