

Technical data sheet

Protection set MCD + V20 1-pole + NPE

Art.-Nr. 5089748




Protection set, lightning and surge arrester combination, type 1+2

- For lightning protection equipotential bonding to VDE 0185-305 (IEC 62305)
- Lightning current arresting capacity to 50 kA (10/350) per pole and up to 125 kA (10/350) N-PE
- Arrester, connectable, including connecting bridges, labelled connection terminals
- Encapsulated, non-extinguishing arrester for use in distributor housings

Application: Mobile telecommunications systems and industrial systems with special requirements.



Dimensions

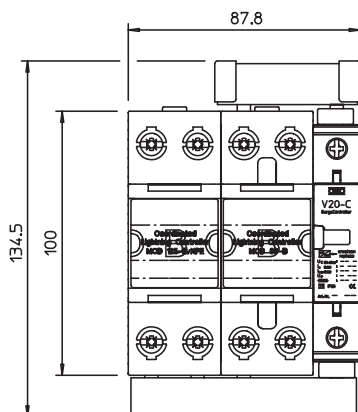

Master data

Item no.	5089748
Type	PS 2-B+C/TT+TNS
Description 1	Protection set
Description 2	two-pole design
Dimension	255V
Smallest sales unit	1,00 Piece
Weight	101,00 kg/100 pc.


Technical data sheet

Protection set MCD + V20 1-pole + NPE

Art.-Nr. 5089748



Technical data

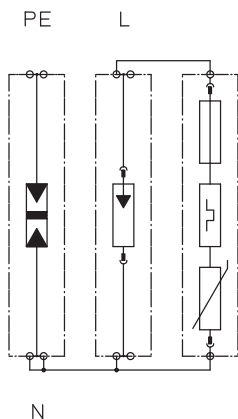

SPD to EN 61643-11	Type 1+2
SPD to IEC 61643-11	Class I+II
Nominal voltage	230,00 V
Maximum continuous voltage AC	255,00 V
Max. continuous operating voltage	255,00 V
Maximum continuous voltage (L-N)	255,00 V
Maximum continuous voltage (N-PE)	255,00 V
Nominal discharge current (8/20 µs)	50,00 kA
Nominal discharge current (8/20)	50 kA
Maximum discharge current (8/20 µs)	100,00 kA
Lightning surge current (10/350 µs)	50,00 kA
Impulse discharge current (10/350)	50,00 kA
Lightning impulse current (10/350) (N-PE)	125,00 kA
Lightning impulse current (10/350) (L-N)	50,00 kA
Lightning surge current (10/350)	100,00 kA
Arrestor surge current (8/20) [total]	100,00 kA
Protection level	<1,3 kV
Follow current quenching capacity (eff) [N-PE]	25,00 kA
Follow current quenching capacity leff	12,50 kA
Response time	<25 ns
Maximum back-up fuse	125,00 A
Temperature range	-40-+85 °C
Pole version	1+N/PE
Version	1 pole with NPE; 255 V
Version	1 + NPE
Mounting type	Hat rail 35 mm
Installation type	DIN rail 35 mm
Protection rating	IP20
Protection rating	IP 20
Division unit TE (17.5 mm)	5
Connection cross-section, flexible	10,00 - 25,00 mm ²
Connection cross-section, rigid	10,00 - 50,00 mm ²
Connection cross-section, multi-wire	10,00 - 35,00 mm ²
Signalling on device	Visual