

# Technical data sheet

Height-adjustable, decouplable cassette for inspection opening, RKRNUZD3, stainless steel  
Item no. 7409150



Height-adjustable "blank" cassette, decoupled from the floor, for the creation of an inspection opening of nominal size R7 in dry or wet-cleaned floors for indoor use, for mounting in underfloor boxes UZD350-3, either in conjunction with a blanking lid DUG350-3R7 or in UGD250-3R7. Mounting takes place using levelling profiles (order separately) in the aluminium frame profile of the underfloor boxes. Only suitable for smooth floor coverings.

Height-adjustable cassette as a blind cassette, 3-compartment 2 APMT2 cover plates and 1 APMT5 cover plate can be installed. For the installation of 2 UT3 universal supports and one UT4 universal support for 7 individual installation devices with support ring/support clamp or 10 Modul 45 devices.



VA Stainless steel, rustproof 1.4301

## Master data

Item no.	7409150
Type	RKRNUZD3R7VS25
Description 1	Round cassette
Description 2	blank
Dimension	ø 275mm
Material	Stainless steel, material no. 1.4301
Material symbol	A2
Smallest sales unit (VG)	1 Piece
Weight	294,00 kg/100 pc.

## Technical data

Floor covering thickness	25,00 mm
Floor height	94 mm
Number of installable devices	0
Number of cable outlets	0
Version for	Round
Floor care	Wet
Installation depth	104,00 mm
Decouplable	<input checked="" type="checkbox"/>
Device support to accept mounting boxes	<input type="checkbox"/>
Nominal size for device installation units	R7
Suitable for raised floor installation	<input type="checkbox"/>
Suitable for cavity floor installation	<input type="checkbox"/>
Suitable for underfloor box	350
Opening mechanism	Tool
Approvals	
Schwerlastausführung	<input type="checkbox"/>
Typ des Einbausystems	UT3 / UT4


# Technical data sheet

Height-adjustable, decouplable cassette for inspection opening, RKRNUZD3, stainless steel  
Item no. 7409150



## Technical data

### Dimensions

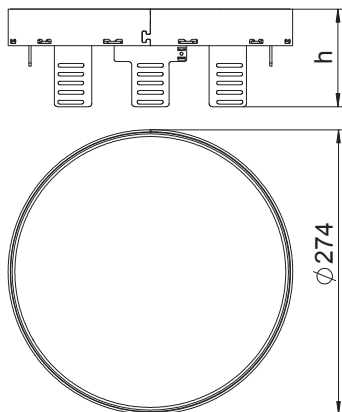

Dimension h	94,00 mm
Installation diameter	275