


Technical data sheet

Pressure clip for 10 cables, flame resistant

Item no. 2204924

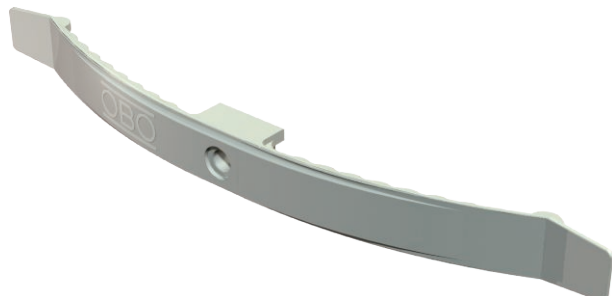

Flame-resistant version, specially for use in suspended ceilings.
Thermoplastic polyester, stone grey RAL 7030, flame-resistant to VDE 0471/DIN IEC 695 Part 2-1, test temperature 960 °C, respectively V-0 to UL 94, halogen-free.
Clamping height 9 mm – with spacer 13 mm.
Fastening hole: 6 mm Ø.




PBT Polybutylene terephthalate

Additional product text 1 | 2034/F for max. 10 conductors NYM 3 x 1.5 mm²

Master data

Item no.	2204924
Type	2034 F
Description 1	Pressure clip
Dimension	2x5 NYM3x1,5
Colour	Stone grey
RAL number	7030
Material	Polybutylene terephthalate
Material symbol	PBT
Smallest sales unit (VG)	50 Piece
Weight	0,81 kg/100 pc.

Technical data

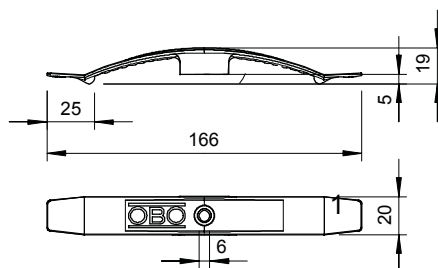

No. of conductors NYM 3 x 1.5	10
Flame-resistant version	<input type="checkbox"/>
Flame-resistant	Acc. to VDE 0471/DIN 695 Part 2-1, test temperature 750°C
Suitable for maintaining electrical function	<input type="checkbox"/>
Halogen-free	<input checked="" type="checkbox"/>
With anchor	<input type="checkbox"/>