


# Technical data sheet

## Clamp clip, triple, plastic pressure trough

Item no. 1162225

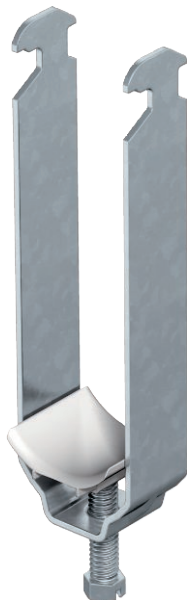

Suitable for all C profile rails with slot width 16–17 mm.

Hot-dip galvanised steel clamp and bolt, polypropylene pressure trough, halogen-free, colour light grey RAL 7035.

Version with welding and/or locknuts for use under difficult circumstances and for shake protection on request.




- St** Steel
- FT** Hot-dip galvanised

### Master data

Item no.	1162225
Type	2056 3 22 FT
Description 1	Clamp clip
Description 2	triple
Dimension	16-22mm
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Smallest sales unit (VG)	50 Piece
Weight	7,10 kg/100 pc.

### Technical data

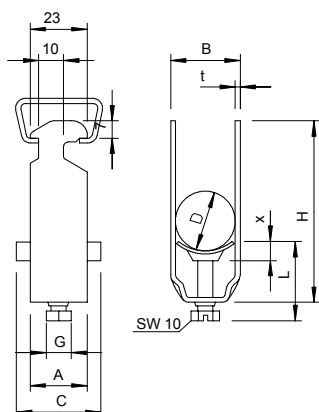

Dimension A	23,00 mm
Dimension B	27,00 mm
Dimension C	34 mm
Dimension G	M6
Dimension H	101,00 mm
Dimension L	47,00 mm
Dimension t	1,50 mm
Dimension x	5,00 mm
Number of cables/pipes	3
Max. tightening torque	3,00 Nm
for rail with slot width	16,00 - 17,00 mm
Halogen-free	<input checked="" type="checkbox"/>
With plastic trough	<input checked="" type="checkbox"/>
With metal trough	<input type="checkbox"/>
Mounting type	Profile rail
Impact-resistant	<input type="checkbox"/>
Clamping range D	16,00 - 22,00 mm
Surface addition	hot galvanised

# Technical data sheet

Clamp clip, triple, plastic pressure trough

Item no. 1162225



## Technical data

Material addition | Steel