


# Technical data sheet

## Clamp clip, triple, plastic pressure trough

Item no. 1162462

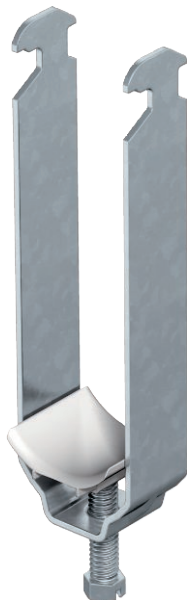

Suitable for all C profile rails with slot width 16–17 mm.

Hot-dip galvanised steel clamp and bolt, polypropylene pressure trough, halogen-free, colour light grey RAL 7035.

Version with welding and/or locknuts for use under difficult circumstances and for shake protection on request.




- St** Steel
- FT** Hot-dip galvanised

### Master data

Item no.	1162462
Type	2056 3 46 FT
Description 1	Clamp clip
Description 2	triple
Dimension	40-46mm
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Smallest sales unit (VG)	25 Piece
Weight	19,80 kg/100 pc.

### Technical data

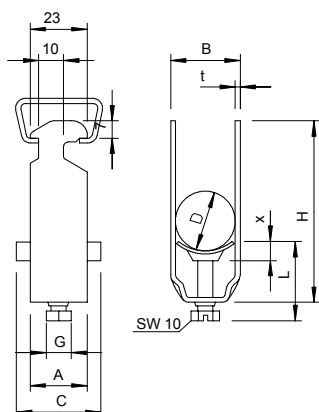

Dimension A	23,00 mm
Dimension B	51,00 mm
Dimension C	40 mm
Dimension G	M8
Dimension H	184,00 mm
Dimension L	56,50 mm
Dimension t	2,00 mm
Dimension x	6,00 mm
Number of cables/pipes	3
Max. tightening torque	5,00 Nm
for rail with slot width	16,00 - 17,00 mm
Halogen-free	<input checked="" type="checkbox"/>
With plastic trough	<input checked="" type="checkbox"/>
With metal trough	<input type="checkbox"/>
Mounting type	Profile rail
Impact-resistant	<input type="checkbox"/>
Clamping range D	40,00 - 46,00 mm
Surface addition	hot galvanised

# Technical data sheet

Clamp clip, triple, plastic pressure trough

Item no. 1162462



## Technical data

Material addition | Steel