

# Technical data sheet

## Quick Clip, flame-resistant, stone grey

Item no. 2149321



OBO Quick clip, type 2955F/... flame-resistant version for all metric steel armoured pipes, as well as lightweight and heavyweight metric insulation pipes. Suitable for mounting the OBO Quick pipe. Pipe centring aids allow optimal attachment of the pipe and automatically turn the clip to the correct position.

Universal fastening option; can be arranged with the OBO Multi-quick and starQuick clip.

Slot for side alignment during mounting with wood screw or knock-in anchor.

Size M16-M32 can be screwed onto an M6 thread.

Recommended fastening spacing 50–60 cm, for max. extraction values F at a room temperature of 20 °C, see the table.




PP Polypropylene

### Master data

Item no.	2149321
Type	2955 F M32 STGR
Description 1	Quick clip
Description 2	flame-resistant
Dimension	M32
Colour	Stone grey
RAL number	7030
Material	Polypropylene
Material symbol	PP
Smallest sales unit (VG)	50 Piece
Weight	0,63 kg/100 pc.

### Technical data

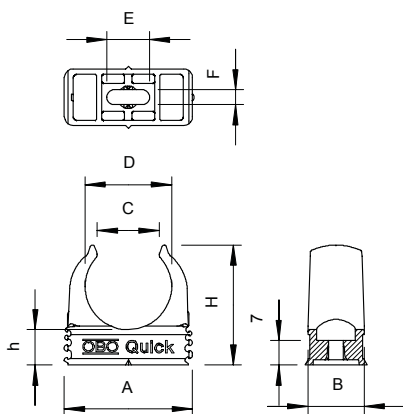

Dimension A	46,30 - 46,30 mm
Dimension B	16,00 mm
Dimension C	22,4 mm
Dimension D	31,40 mm
Dimension E	12,00 mm
Dimension F	4,20 mm
Dimension H	42,00 mm
Dimension h	11,00 mm
Expandable	<input checked="" type="checkbox"/>
Number of cables/pipes	1
Pull-out value	120 N
Fastening type	Screw hole
Flame-resistant	acc. to VDE 0471/DIN 695 Part 2-1, test temperature 750°C
Closed	<input type="checkbox"/>
Nominal size	M32
Halogen-free	<input checked="" type="checkbox"/>
With inlay	<input type="checkbox"/>
Clip mounting	Gland hole, adjustable to fit thread M6
UV-resistant	<input type="checkbox"/>