

Technical data sheet


Support bracket AS 30

Item number: 6419388



Medium-duty support bracket for infinitely adjustable fastening on IS 8 support. The support bracket can be fastened to both sides of the I support.

The individual clamping lug, including bolt, nut and washer can also be ordered separately under the item no. 6419007.

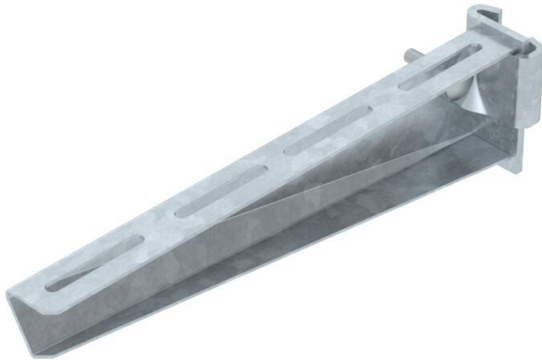

St

Steel

FT

Hot-dip galvanised

Master data

| | |
|---------------------|--------------------|
| Item number | 6419388 |
| Type | AS 30 31 FT |
| Description 1 | Support bracket |
| Description 2 | for IS 8 support |
| Manufacturer | OBO |
| Dimension | B310mm |
| Colour | zinc |
| Material | Steel |
| Surface | Hot-dip galvanised |
| Surface standard | DIN EN ISO 1461 |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 73 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

Support bracket AS 30

Item number: 6419388



Dimensions

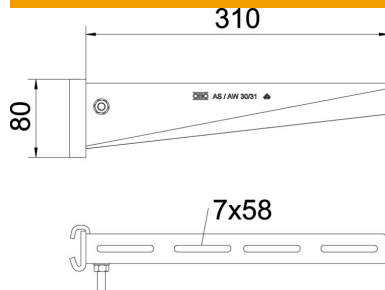


| | |
|-------------|--------|
| Length | 41 mm |
| Width | 310 mm |
| Height | 80 mm |
| Dimension A | 41 mm |
| Dimension B | 310 mm |
| Dimension H | 80 mm |

Technical data

| | |
|-------------------------------|-----------------|
| Version for | Support bracket |
| F in kN | 3 kN |
| Maintain electrical functions | no |
| Rustproof steel, pickled | no |

Loads

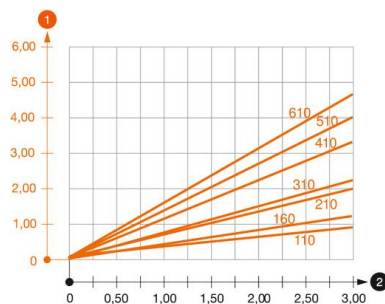

Load diagram, bracket type AS 30

- 1 Bending of the bracket tip at permitted bracket load
- 2 Permitted bracket load in kN without man load
- Load curve with bracket lengths in mm