

Technical data sheet

Lightning Controller MC 50-B

Item number: 5096859



Type 1 lightning arrester in accordance with DIN EN 61643-11 for interface 0 to 1 (LPZ) to and/or in accordance with lightning protection concept to IEC 61313-1 and/or DIN VDE 0185 Part 4.

- Cover and base, plug-in cover
- Arresting capacity 50 kA 10/350 μ s per pole
- Voltage protection level < 2.0 kV
- Line following current quenching 10 kA I_{peak}
- Incl. plug caps for labelling the connections
- Encapsulated, non-extinguishing spark gap: can be used in standard distributor housings

Application example: Industrial plants; lightning arrester in accordance with VDE-AR-N 4100 for pre-meter area.


Note: Requires as a decoupling length for surge protection 5 m of cable.



Master data

Item number	5096859
Type	MC 50-B
Description 1	LightningController
Manufacturer	OBO
Dimension	320V
Smallest sales unit	1
Unit of quantity	Piece
Weight	40 kg
Weight unit	kg/100 pc.

Dimensions

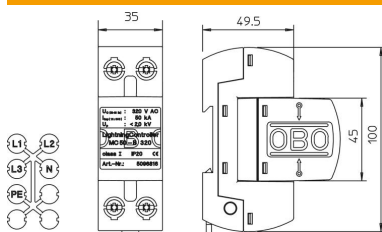

Length	100 mm
Width	35 mm
Height	69 mm


Technical data sheet

Lightning Controller MC 50-B

Item number: 5096859



Technical data

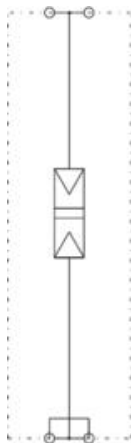

Arrester surge current (8/20 μ s) [total]	120 kA
Response time	<100 ns
Blow-out	no
Pole version	1
Structural width in division units (division unit, 17.5 mm)	2
Operating temperature, max.	85 °C
Operating temperature, min.	-40 °C
Lightning surge current (10/350 μ s)	50 kA
Lightning surge current (10/350)	50 kA
Explosion-tested version	no
Remote signalling	no
Follow current quenching capacity (eff) [N-PE]	10 kA
Follow current quenching capacity leff	7
Maximum continuous voltage AC	320
Short-circuit resistance	25 kA
Short-circuit resistance for max. mains-side overcurrent protection	25 kA
Conductor cross-section, rigid (single-wire/multiwire), max.	50 mm ²
Conductor cross-section, rigid (single-wire/multiwire), min.	10 mm ²
Lightning protection zone LPZ	0→1
Max. mains-side overcurrent protection	500
Maximum back-up fuse	500 A
Installation type	DIN rail 35 mm
Nominal discharge current (8/20 μ s)	50 kA
Nominal voltage AC (50/60 Hz)	230 V
Network form	All
Test class, type 1	yes
Protection rating	IP20
Protection level	≤2,0
Signalling on device	None
SPD to EN 61643-11	Type 1
SPD to IEC 61643-1	Class I