

Technical data sheet

Junction box T 40, plug-in seal, flame-resistant

Item no. 2007320



Junction box for the connection of cables and lines indoors and in protected outdoor areas. Square design with plug-in seals to the sides and knock-out entries in the bottom. Suitable for wall and ceiling mounting and on mounting panels. With the option to fasten inside. With fixed clamping cover. Flame-resistant type made from special polypropylene.

Junction box according to DIN EN 60670. Flame-resistant to DIN EN 60695-2-11, test temperature 960 °C. Impact resistance IK07 according to DIN EN 50102.




PP Polypropylene

Additional product text, instruction
Standard version: flame-resistant, testing temperature 650 °C.
F version: highly flame-resistant, testing temperature 960 °C.

Master data

Item no.	2007320
Type	T 40 F
Description 1	Junction box
Description 2	with entries
Dimension	90x90x52
Colour	Light grey
RAL number	7035
Material	Polypropylene
Material symbol	PP
Smallest sales unit (VG)	5 Piece
Weight	6,70 kg/100 pc.

Technical data

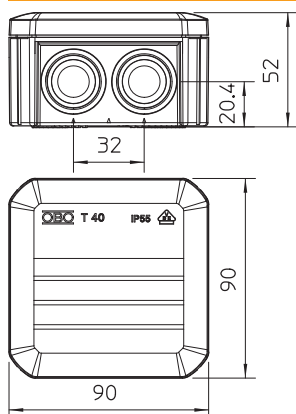

Length	90,00 mm
Width	90,00 mm
Height	52,00 mm
Clear internal dimensions	77x77x46 mm
Dimension LxWxH	90x90x52 mm
Dimension	90x90x52 mm
Expandable	<input checked="" type="checkbox"/>
No. of entries	7
Type of entry	Cable
Type of entry	Plug-in seal
Type of housing penetration	Cuttable stepped membrane
Version	960 °C flame-resistant
Measured insulation voltage Vi	500,00 V
Equipment	Without
Cover	Not transparent
Cover fastening	Locking
Entries	7 x M25
Entry from rear	<input checked="" type="checkbox"/>

Technical data sheet

Junction box T 40, plug-in seal, flame-resistant

Item no. 2007320



Technical data

Explosion-tested version	<input type="checkbox"/>
Flame-resistant	acc. to VDE 0471/DIN 695 Part 2-1, test temperature 960°C
Shape	Square
Function maintenance (ETIM)	Without
For Ex zone	Without
For Ex zone gas	Without
For Ex zone dust	Without
Fibre-glass reinforced	<input type="checkbox"/>
With screening	<input type="checkbox"/>
with lid	With locking lid
With cover	<input checked="" type="checkbox"/>
Installation type	Wall/ceiling mounting
Mounting type	Wall/ceiling mounting
Nominal cross section	4,00 mm ²
Nominal voltage	500,00 V
Protection rating	IP55
Protection rating	IP55
Protection rating IK code	IK07.
Sealable	<input type="checkbox"/>
max. permitted ambient temperature	-5,00 - 60,00 °C
Transparent lid	<input type="checkbox"/>
Weatherproof	<input type="checkbox"/>